


NPN
NO
flush mountable

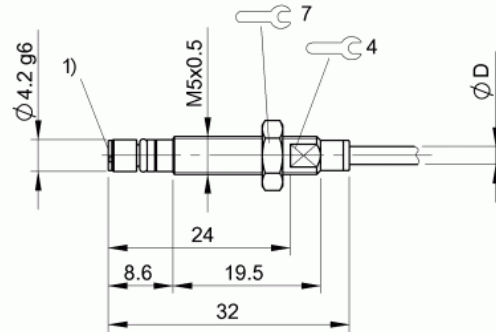

General data:

Protected against polarity reversal	yes
Approval	CE,c_ul_us
Power Indication	no
Degree of protection IP	IP68 per BWN Pr 20
Output indication	no
Short circuit protected	yes
Features	pressure rated to 350 bar

Number of wires	3-wire
Assured operating distance	0...0,8 mm
Cable code designation	PUR
Temperature drift max.	10 %
Housing material	1.4104
Cable diameter	2.5 mm
Conductor cross section	0,10 mm ²
Mounting	flush mountable
Degree of pollution	3
Sensing face material	ZrO ₂
Cable length	2.0 m
Cable sheath material	PUR
Repeat accuracy max. (R)	5 %
Rated operating distance (sn)	1 mm
Diameter	M5x0,5 mm
Ambient temperature max	+80 °C
Ambient temperature min	-25 °C