




DCC 18 M 08B NSLK

Inductive Proximity Switch

- Cable, highly flexible
- Integrated amplifier
- Short-circuit protection
- Starting pulse suppression
- LED

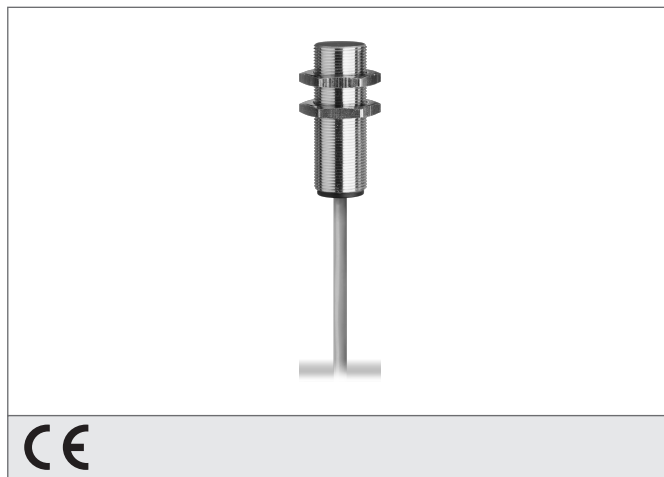

CE

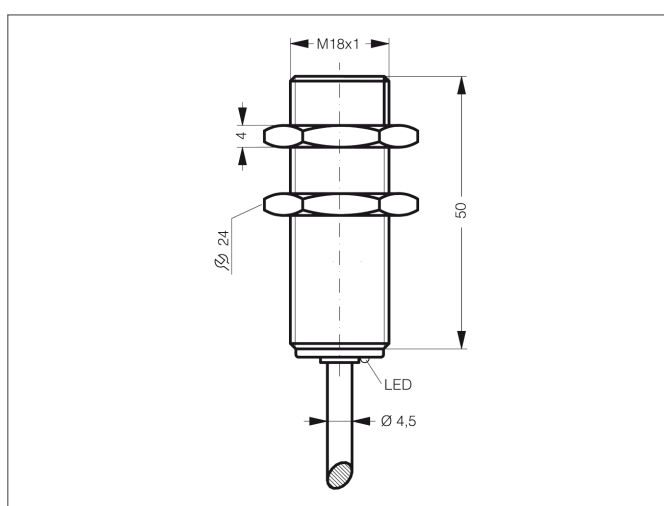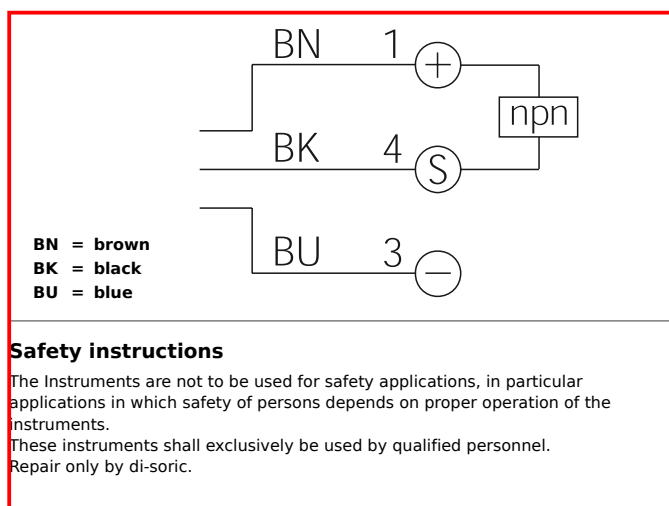

TECHNISCHE DATEN (typ.)		+20°C, 24V DC
Operating principle		Inductive
Evaluation		digital
Size		M18 x 1 (Gewinde)
Design		screw
Mounting		quasi-flush
Characteristics		standard
Operating distance		8 mm
Standardized measuring plate		24 x 24 x 1 mm
Service voltage		10 ... 30 V DC
Output		npn, 200 mA, NO
Internal power consumption		< 10 mA
Voltage drop		< 2,0 V
Operating frequency		1.000 Hz
Switching hysteresis		< 10 %
Ambient temperature		-25 ... +70 °C
Insulation voltage endurance		500 V
Protection class		IP 67
Casing material		brass nickel plated
Connection		cable PVC, Connector, M12, 2.000 mm