

# Proximity Sensors Capacitive PVC Housing Type CA, M18, DC

**TRIPLESIELD™**



- Featuring **TRIPLESIELD™** sensor protection
- Adjustable sensing distance 3-8 mm
- Rated operational voltage: 10-40 VDC
- Output: DC 200 mA, NPN or PNP
- Make and break switching function
- LED indication
- High noise immunity
- Flush types
- Cable versions

## Product Description

Capacitive proximity switches with sensing distance of 8 mm flush mounted in metal. 4-wire DC output with both make (NO) and break (NC) switching.

Grey M18 PVC housing with 2 m PVC cable. Ideal for use in level applications in chemical, semi-conductor and food & beverage industries.

## Ordering Key

**CA 18 GLF 08 NA**

Type \_\_\_\_\_  
Housing style \_\_\_\_\_  
Housing size \_\_\_\_\_  
Housing material \_\_\_\_\_  
Housing length \_\_\_\_\_  
Detection principle \_\_\_\_\_  
Sensing distance \_\_\_\_\_  
Output type \_\_\_\_\_  
Output configuration \_\_\_\_\_

## Type Selection

Housing diameter	Rated operating dist. (S <sub>n</sub> ) <sup>1)</sup>	Mounting	Ordering no. Transistor NPN Make & break switching	Ordering no. Transistor PNP Make & break switching
M18	8 mm	Flush (built-in)	CA18GLF08NA	CA18GLF08PA

<sup>1)</sup> Object: Grounded steel plate

## Specifications

<b>Rated operating dist. (S<sub>n</sub>)</b> CA18GLF08	3 to 8 mm factory set at 8 mm	<b>Indication for output ON</b>	LED, yellow
<b>Sensitivity</b>	Adj. 270° turn pot. meter	<b>Environment</b> Degree of protection	IP 67 (Nema 1, 3, 4, 6, 13)
<b>Effective operation dist. (S<sub>r</sub>)</b>	$0.9 \times S_n \leq S_r \leq 1.1 \times S_n$	<b>Temperature</b> Operating temperature	-25° to +60°C (-13° to +176°F)
<b>Usable operation dist. (S<sub>u</sub>)</b>	$0.8 \times S_r \leq S_u \leq 1.2 \times S_r$	Storage temperature	-40° to +65°C (-40° to +185°F)
<b>Repeat accuracy (R)</b>	≤ 5%	<b>Housing material</b> Body, front, nuts	Grey PVC
<b>Hysteresis (H)</b>	4 to 20% of sensing distance	<b>Connection</b> Cable	Grey, 2 m, 4 x 0.34 mm <sup>2</sup> Oil proof PVC
<b>Rated operational volt. (U<sub>B</sub>)</b>	10 to 40 VDC (ripple included)	<b>Weight</b>	110 g
<b>Ripple</b>	≤ 10%	<b>CE-marking</b>	Yes
<b>Rated operational current (I<sub>a</sub>)</b> Continuous	≤ 200 mA		
<b>No-load supply current (I<sub>o</sub>)</b>	≤ 10 mA		
<b>Voltage drop (U<sub>d</sub>)</b>	≤ 2.5 VDC at max. load		
<b>Protection</b>	Reverse polarity, short-circuit, transients		
<b>Frequency of operating cycles (f)</b>	30 Hz		


Subject to reasonable modifications due to technical advances.

Printed in Germany


Sensotronik AB • Tel. +46 44 200 800 • Fax +46 44 200 899 • info@sensotronik.se • http://www.sensotronik.se

**SENSOTRONIK**

## Dimensions

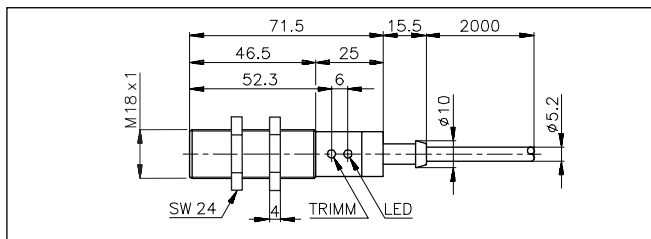

## Wiring Diagrams

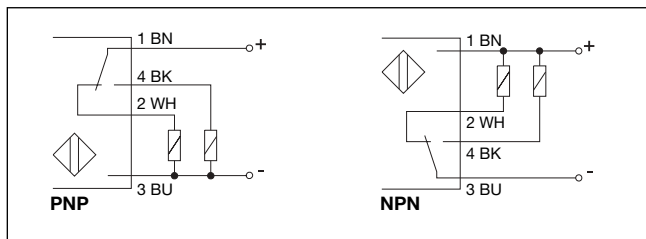


## Adjustment Guide

The environments in which capacitive sensors are installed can often be unstable regarding temperature, humidity, object distance and industrial (noise) interference. Because of this, Carlo Gavazzi offers as standard features in all **TRIP-LESHIELD™** capacitive sensors a user-friendly sensitivity adjustment instead of having a fixed sensing range, extended sensing range to accom-

modate mechanically demanding areas, temperature stability to ensure minimum need for adjusting sensitivity if temperature varies and high immunity to electromagnetic interference (EMI).

### Note:

Sensors are factory set (default) to maximum rated sensing range.

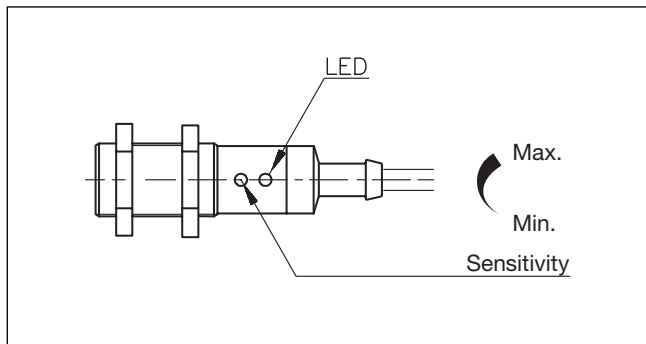

## Installation Hints

Capacitive sensors have the unique ability to detect almost all materials, either in liquid or solid form. Capacitive sensors can detect metallic as well as non-metallic objects, however, their traditional use is for non-metallic materials such as:

### • Plastic Industry

Resins, regrinds or moulded products.

### • Chemical Industry

Cleansers, fertilisers, liquid soaps, corrosives and petrochemicals.

### • Wood Industry

Saw dust, paper products, door and window frames.

### • Ceramic & Glass Industry

Raw material, clay or finished products, bottles.

### • Semi-conductor Industry


### • Food & Beverage Industry

### • Packaging Industry


Package inspection for level or contents, dry goods, fruits and vegetables, dairy products.

Materials are detected due to their dielectric constant. The bigger the size of an object, the higher the density of material, the better or easier it is to detect the object. Nominal sensing distance for a capacitive sensor is referenced to a grounded metal plate (ST37). For additional information regarding dielectric ratings of materials please refer to Technical Information.

To avoid interference from inductive voltage/current peaks, separate the prox. switch power cables from any other power cables, e.g. motor, contactor or solenoid cables




Relief of cable strain




The cable should not be pulled

Protection of the sensing face



A proximity switch should not serve as mechanical stop

Switch mounted on mobile carrier

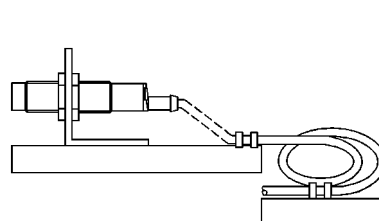

Any repetitive flexing of the cable should be avoided

## Delivery Contents

- Capacitive switch: CA18GL...
- Screw driver
- 2 nuts
- **Packaging:** Cardboard box
- Installation & Adjustment Guide