

Proximity Sensors Capacitive Stainless Steel Housing Type EC, M30, AC

TRIPLESHIELD™



- Featuring **TRIPLESHIELD™** sensor protection
- Rated operational voltage: 20-250 VAC
- Adjustable sensing distance 2-16 mm or 4-25 mm
- Output: SCR
- Make and break switching function
- LED indication
- High noise immunity
- Flush and non-flush types
- Plug and cable versions available
- DC versions in the same housing

Product Description

Capacitive proximity switches with either sensing distance 16 mm flush mounted or 25 mm sensing distance non-flush mounted. 2-wire AC output with a switch for choosing NO and NC

switching. M30 stainless steel housing with 2 m PVC cable or plug. Ideal for use in level and plastic machinery applications. Both types are available in polyester housings.

Ordering Key

EC 3025 TBA S L-6

Capacitive proximity switch	_____
Housing diameter (mm)	_____
Rated operating dist. (mm)	_____
Output type	_____
Housing material	_____
Housing type	_____
Connection type	_____

Type Selection

Housing diameter	Rated operating dist. (S _n) ¹⁾	Mounting	Ordering no. SCR, cable Make & break switching	Ordering no. SCR, plug Make & break switching
M30	16 mm	Flush (built-in)	EC 3016 TBASL	EC 3016 TBASL-6
M30	25 mm	Non-flush	EC 3025 TBASL	EC 3025 TBASL-6

¹⁾ Object: Grounded steel plate

Specifications

Rated operating dist. (S _n) 3016:	2 to 16 mm factory set at 16 mm	Power ON delay	≤ 100 ms
3025:	4 to 25 mm factory set at 25 mm	Frequency of operating cycles (f)	10 Hz
Sensitivity	Adj. multiturn pot.meter	Indication for output ON	LED, yellow
Effective operating dist. (S _r)	0.9 x S _n ≤ S _r ≤ 1.1 x S _n	Environment Degree of protection	IP 67 (Nema 1, 3, 4, 6, 13)
Usable operating dist. (S _u)	0.8 x S _r ≤ S _u < 1.2 x S _r	Temperature Operating temperature	-25° to +80°C (-13° to +176°F)
Repeat accuracy (R)	≤ 5%	Storage temperature	-40° to +85°C (-40° to +185°F)
Hysteresis (H)	4 to 20% of sensing distance	Housing material	
Rated operational volt. (U _B)	20 to 250 VAC (ripple included)	Body	Stainless steel (St 304)
Ripple	≤ 10%	Front	Grey, polyester
Rated operational current (I _e)		Cable end	Polyester
Continuous	≤ 500 mA	Nuts	Nickel plated brass
Short-time	< 2.5 A (max. 20 ms)	Connection	
Min. load current	≤ 10 mA	Cable	Grey, 2 m, 2 x 0.5 mm ²
OFF-state current (I _i)	< 2.5 mA (@ 240 VAC) 1.7 mA (@ 120 VAC)	Plug (-6)	Oil proof, PVC
Voltage drop (U _d)	≤ 10 VAC (at loads ≥ 20 mA)	Cable for plug (-6)	M12 x 1 double keyed CON.-6A-series
Protection	Transients	Weight (incl. nuts)	3016: 140 g 3025: 150 g
		Approvals	UL
		CE-marking	Yes



Subject to reasonable modifications due to technical advances.

Sensotronik AB • Tel. +46 44 200 800 • Fax +46 44 200 899 • info@sensotronik.se • <http://www.sensotronik.se>

Printed in Germany

SENSOTRONIK

Dimensions

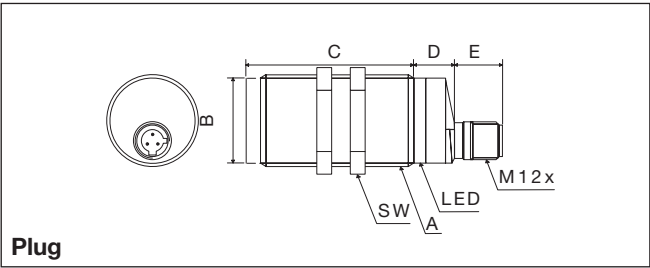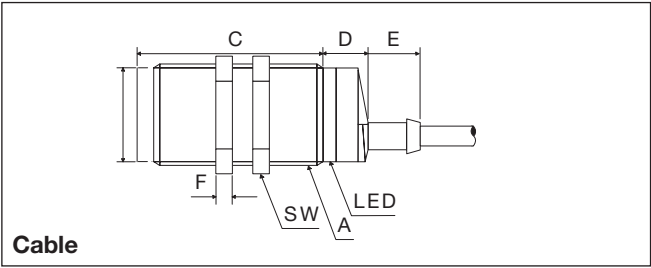


Type	A	B Ø mm	C mm	D mm	E mm	F mm	SW mm
EC 3016TBASL(-6)	M30 x 1.5 x 50	28	50	13.6	15.4	5	36
EC 3025TBASL(-6)	M30 x 1.5 x 50	28	62	13.6	15.4	5	36

Adjustment Guide

The environments in which capacitive sensors are installed can often be unstable regarding temperature, humidity, object distance and industrial (noise) interference. Because of this, Carlo Gavazzi offers as standard features in all *TRIPLESIELD™* capacitive sensors a user-friendly sensitivity adjustment instead of having a fixed sensing range, extended sensing range to accom-

modate mechanically demanding areas, temperature stability to ensure minimum need for adjusting sensitivity if temperature varies and high immunity to electromagnetic interference (EMI).

Note:
Sensors are factory set (default) to maximum rated sensing range.

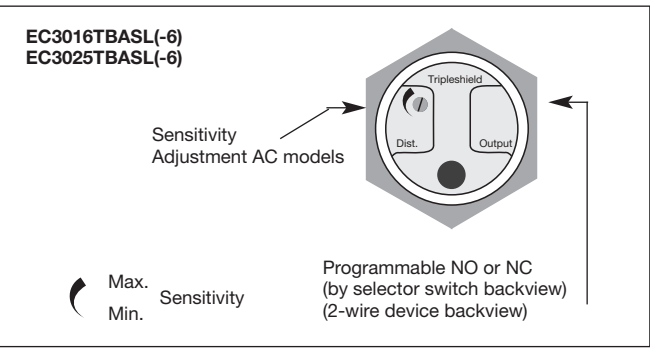

Installation Hints


Capacitive sensors have the unique ability to detect almost all materials, either in liquid or solid form. Capacitive sensors can detect metallic as well as non-metallic objects, however, their traditional use is for non-metallic materials such as:

- Plastic Industry**
Resins, regrinds or moulded products.


- Chemical Industry**
Cleansers, fertilisers, liquid soaps, corrosives and petrochemicals.
- Wood Industry**
Saw dust, paper products, door and window frames.
- Ceramic & Glass Industry**
Raw material, clay or finished products, bottles.

- Packaging Industry**
Package inspection for level or contents, dry goods, fruits and vegetables, dairy products.
- Materials are detected due to their dielectric constant. The bigger the size of an object, the higher the density of material, the better or easier it is to detect the object. Nominal sensing distance for a capaci-

tive sensor is referenced to a grounded metal plate (ST37). For additional information regarding dielectric ratings of materials please refer to Technical Information.

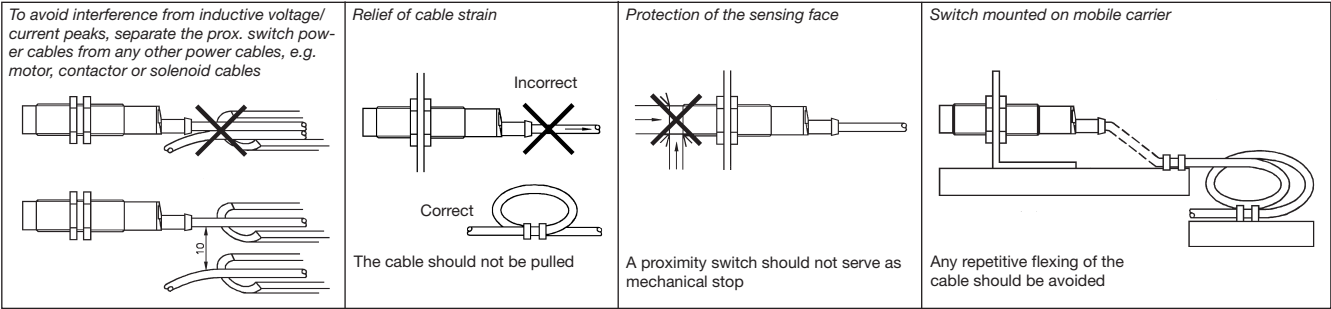

Wiring Diagram

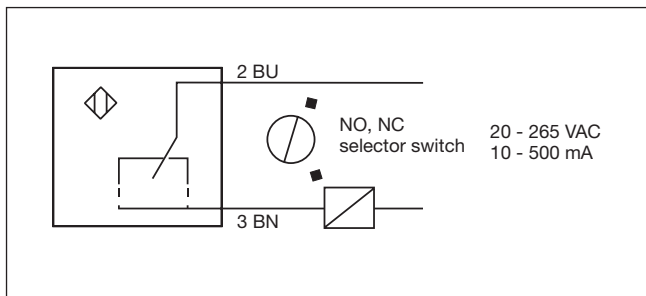

Delivery Contents

- Capacitive switch: EC 30.. TBASL(-6)
- Screw driver
- 2 nuts
- **Packaging:** Cardboard box
- Installation & Adjustment Guide (MAN CAP ENG/GER)

Accessories

- Plugs CON.6A.. serie

For further information refer to "Accessories".