



Comfort series
10 mm not embeddable
Flat housing
mounting slots for cable
ties
chemically constant housing
made of PVDF

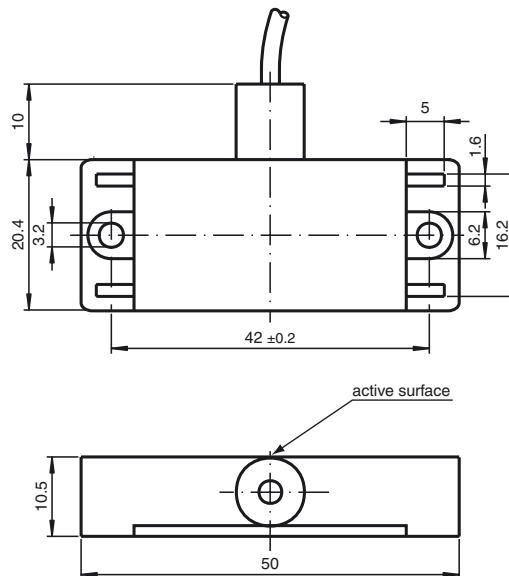

General specifications	
Switching element function	NAMUR NO
Rated operating distance s_n	10 mm
Installation	not embeddable
Assured operating distance s_a	0 ... 7 mm
Nominal ratings	
Nominal voltage U_o	8,2 V (R_i approx. 1 k Ω)
Switching frequency f	0 ... 10 Hz
Hysteresis H	1 ... 10 typ. 5 %
Current consumption	
Measuring plate not detected	≤ 1 mA
Measuring plate detected	$\geq 2,2$ mA
Standard conformity	
EMC in accordance with	EN 60947-5-2
Standards	DIN EN 60947-5-6 (NAMUR)
Ambient conditions	
Ambient temperature	-25 ... 70 °C (248 ... 343 K)
Storage temperature	-40 ... 85 °C (233 ... 358 K)
Mechanical specifications	
Connection type	2 m, PVDF cable
Core cross-section	0.14 mm ²
Housing material	PVDF
Sensing face	PVDF
Protection degree	IP68
Note	cable tensile strength 20 N
General information	
Use in the hazardous area	see instruction manuals
Category	1G; 2G; 1D

Connection type:

N1



ATEX 1G

Instruction

Device category 1G

Directive conformity

Standard conformity

CE symbol

Ex-identification

EC-Type Examination Certificate

Appropriate type

Effective internal capacitance C_i

Effective internal inductance L_i

Cable length

Explosion group IIA

Explosion group IIB

Explosion group IIC

General

Highest permissible ambient temperature

Installation, Commissioning

Maintenance

Special conditions

Protection from mechanical danger

Electrostatic charging

Manual electrical apparatus for hazardous areas

BR for use in hazardous areas with gas, vapour and mist

94/9/EG

EN 50014:1997; EN 50020:1994; EN 50284:1999

Ignition protection "Intrinsic safety"

Use is restricted to the following stated conditions

CE 0102

Ex II 1G EEx ia IIC T6

TÜV 03 ATEX 2003 X

CCN10-F46A-N...

≤ 45 nF ; a cable length of 10 m is considered.

negligibly small

Dangerous electrostatic charges on the fixed connection cable must be taken into account for lengths equal to and exceeding the following values:

147 cm

73 cm

11 cm

The apparatus has to be operated according to the appropriate data in the data sheet and in this instruction manual.

The EU prototype test certificate must be observed. The special conditions must be adhered to! Directive 94/9/EG and hence also the prototype test certificates are in general only applicable to the use of electrical apparatus operating at atmospheric conditions.

The temperature ranges, according to temperature class, are given in the EU prototype test certificate. Note: Use the temperature table for category 1 !!! The 20 % reduction in accordance with EN 1127-1:1997 has already been accounted for in the temperature table for category 1.

Laws and/or regulations and standards governing the use or intended usage goal must be observed.

The intrinsic safety is only assured in connection with an appropriate related apparatus and according to the proof of intrinsic safety.

The associated apparatus must satisfy the requirements of category ia.

Due to the possible danger of ignition, which can arise due to faults and/or transient currents in the equipotential bonding system, galvanic isolation of the power supply and signal circuit is preferable. Associated apparatus without electrical isolation must only be used if the appropriate requirements of IEC 60079-14 are met.

No changes can be made to apparatus, which are operated in hazardous areas. Repairs to these apparatus are not possible.

The sensor must not be mechanically damaged.

When used in the temperature range below -20°C the sensor should be protected from knocks by the provision of an additional housing.

When used in group IIC non-permissible electrostatic charges should be avoided on the plastic housing parts.

ATEX 2G

Instruction

Device category 2G

Directive conformity

Standard conformity

CE symbol

Ex-identification

EC-Type Examination Certificate

Appropriate type

Effective internal capacitance C_i

Effective internal inductance L_i

General

Highest permissible ambient temperature

Installation, Commissioning

Maintenance

Special conditions

Protection from mechanical danger

Manual electrical apparatus for hazardous areas

for use in hazardous areas with gas, vapour and mist

94/9/EG

EN 50014:1997, EN 50020:1994

Ignition protection "Intrinsic safety"

Use is restricted to the following stated conditions

CE 0102

Ex II 1G EEx ia IIC T6

TÜV 03 ATEX 2003 X

CCN10-F46A-N...

≤ 45 nF ; a cable length of 10 m is considered.

negligibly small

The apparatus has to be operated according to the appropriate data in the data sheet and in this instruction manual. The EU prototype test certificate must be observed. The special conditions must be adhered to! Directive 94/9EG and hence also the prototype test certificates are in general only applicable to the use of electrical apparatus operating at atmospheric conditions.

The temperature ranges, according to temperature class, are given in the EU prototype test certificate.

Laws and/or regulations and standards governing the use or intended usage goal must be observed.

The intrinsic safety is only assured in connection with an appropriate related apparatus and according to the proof of intrinsic safety.

No changes can be made to apparatus, which are operated in hazardous areas. Repairs to these apparatus are not possible.

The sensor must not be mechanically damaged.

When used in the temperature range below -20°C the sensor should be protected from knocks by the provision of an additional housing.

ATEX 1D

Instruction

Device category 1D

Directive conformity

Standard conformity

CE symbol

Ex-identification

EC-Type Examination Certificate

Appropriate type

Effective internal capacitance C_i

Effective internal inductance L_i

General

Maximum housing surface temperature

Installation, Commissioning

Maintenance

[Fett]Special conditions

Electrostatic charging

Manual electrical apparatus for hazardous areas

for use in hazardous areas with combustible dust

94/9/EG

IEC 61241-11:2002: draft; prEN61241-0:2002

type of protection intrinsic safety "iD"

Use is restricted to the following stated conditions

CE 0102

Ex II 1D Ex iaD 20 T 85 °C

ZELM 03 ATEX 0128 X

CCN10-F46A-N...

≤ 45 nF ; a cable length of 10 m is considered.

negligibly small

The apparatus has to be operated according to the appropriate data in the data sheet and in this instruction manual.

The EU prototype test certificate must be observed.

The special conditions must be adhered to!

The maximum surface temperature of the housing is given in the EC-Type Examination Certificate.

Laws and/or regulations and standards governing the use or intended usage goal must be observed.

The intrinsic safety is only assured in connection with an appropriate related apparatus and according to the proof of intrinsic safety.

The associated apparatus must satisfy at least the requirements of category ia IIB or iaD. Because of the possibility of the danger of ignition, which can arise due to faults and/or transient currents in the equipotential bonding system, galvanic isolation in the power supply and signal circuits is preferable. Associated apparatus without electrical isolation must only be used if the appropriate requirements of IEC 60079-14 are met.

The intrinsically safe circuit has to be protected against influences due to lightning.

When used in the isolating wall between Zone 20 and Zone 21 or Zone 21 und Zone 22 the sensor must not be exposed to any mechanical danger and must be sealed in such a way, that the protective function of the isolating wall is not impaired. The applicable directives and standards must be observed.

No changes can be made to apparatus, which are operated in hazardous areas. Repairs to these apparatus are not possible.

The connection cables are to be laid in accordance with EN 50281-1-2 and must not normally be subjected to chaffing during use.