


OGU 050/125 VP3K-TSSL

Fork Light Barrier

- Adjustable from the front
- Metal casing
- Integrated electronic module
- Sensitivity adjustable
- High operating frequency
- Light / dark switching
- Bright ring LED
- High protection class
- 3-years function guarantee* *according to our General Conditions of Export

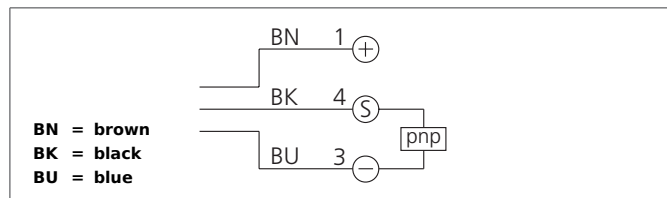


Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.

These instruments shall exclusively be used by qualified personnel.

Repair only by di-soric.

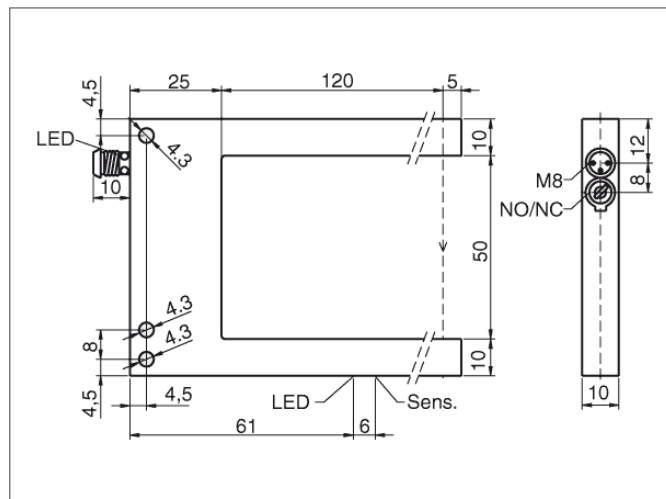

TECHNICAL INFORMATION		+20°C, 24V DC
Evaluation		digital
Size		70 x 150 x 10 mm (Dimensions)
Design		fork
Fork opening		50 mm
Emitted light		Infrared, clocked
Service voltage		10 ... 35 V DC
Transmitter / receiver		transmitter + receiver
Output		pnp, 200 mA, NO/NC, switchable
Sensitivity adjustment		potentiometer in front
Internal power consumption		< 30 mA
Voltage drop		2,8 V
Operating frequency		4.000 Hz
Resolution		Ø 0,5 mm
Switching hysteresis		< 0,25 mm
Reproducibility		0,06 mm
Ambient temperature		-10 ... +60 °C
Ambient light immunity		> 25 kLx
Insulation voltage endurance		500 V
Protection class		IP 67
Casing material		Aluminium black anodized
Connection		Connector, M8, 3-poled