
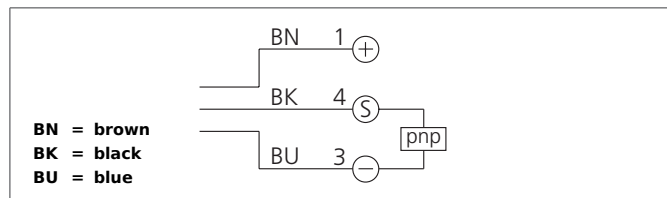


## OGU 081 P3K-TSSL/V4A

### Fork Light Barrier

- Robust stainless steel casing for use in the pharma, beverage and food industry
- beverage and food industry
- Integrated electronic module
- Sensitivity adjustable
- High operating frequency
- Light / dark switching
- Bright ring LED
- High protection class
- 3-years function guarantee\* \*according to our General Conditions of Export
- \*according to our General Conditions of Export

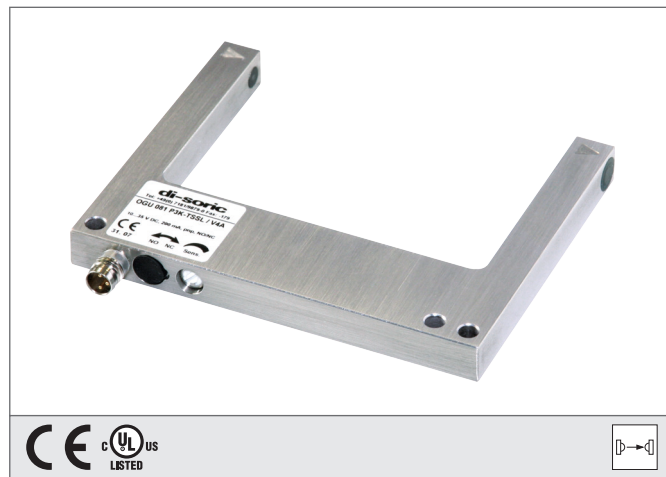


#### Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.

These instruments shall exclusively be used by qualified personnel.

Repair only by di-soric.

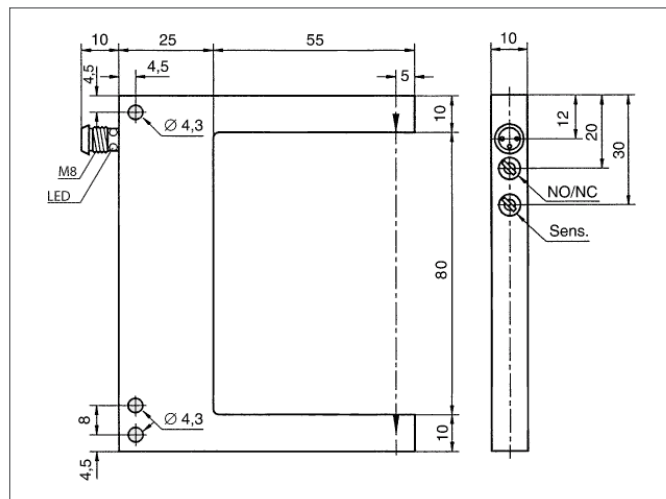

TECHNICAL INFORMATION		+20°C, 24V DC
Evaluation		digital
Size		100 x 80 x 10 mm (Dimensions)
Design		fork
Fork opening		80 mm
Emitted light		Red, 660 nm, clocked
Service voltage		10 ... 35 V DC
Transmitter / receiver		transmitter + receiver
Output		pnp, 200 mA, NO/NC, switchable
Sensitivity adjustment		potentiometer
Internal power consumption		< 30 mA
Voltage drop		2,8 V
Operating frequency		4.000 Hz
Resolution		Ø 0,5 mm
Switching hysteresis		< 0,25 mm
Reproducibility		0,06 mm
Ambient temperature		-10 ... +60 °C
Ambient light immunity		> 25 kLx
Protection class		IP 67
Casing material		stainless steel V4A (1.4404 / 1.4571)
Connection		Connector, M8, 3-poled