

OSP 50 V 20000-0.3BS/IP69K

High Performance Photoelectric Sensor, Transmitter

- Protection class IP 69K, connecting cable included
- Stainless steel casing for use in the beverage and food industry
- Functional reserve indicator/contamination indicator
- Durable laser marking

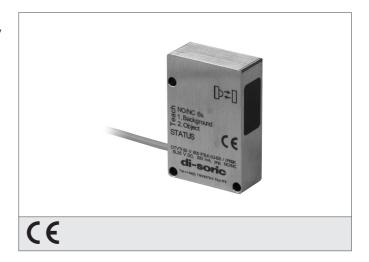


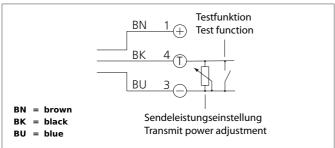

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.

These instruments shall exclusively be used by qualified personnel. Repair only by di-soric.

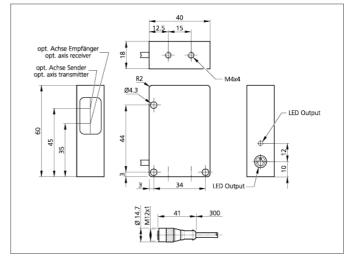

TECHNICAL INFORMATION	+20°C, 24V DC
Size	60 x 41 x 18 mm (Dimensions)
Design	cuboid design
Emitted light	Infrared, 880 nm, clocked
Service voltage	10 35 V DC
Operating distance	0 20 m
Transmitter / receiver	transmitter
Opening angle	6°
Internal power consumption	< 55 mA
Ambient temperature	-10 +60 °C
Protection class	IP 69K
Casing material	stainless steel
Material	polymethyl methacrylate (Window)
Connection	Cable, 300 mm, + connector M12

