


## ORVTI 51 V 2000 N3LK-5M/IP69K-R

### Retroreflective Sensor


- Protection class IP 69K, connecting cable included
- Stainless steel casing for use in the beverage and food industry
- Durable protection and sealing of the optics thanks to protection frame with O-ring inserted
- Entire operation via teach key
- Functional reserve indicator/contamination indicator
- Durable laser marking

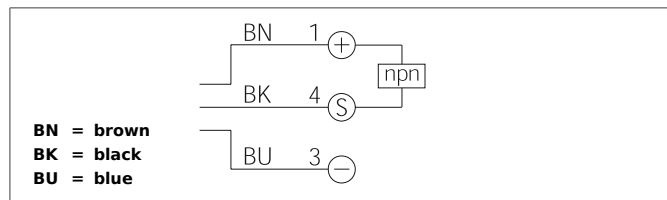

#### Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.

These instruments shall exclusively be used by qualified personnel.  
Repair only by di-soric.

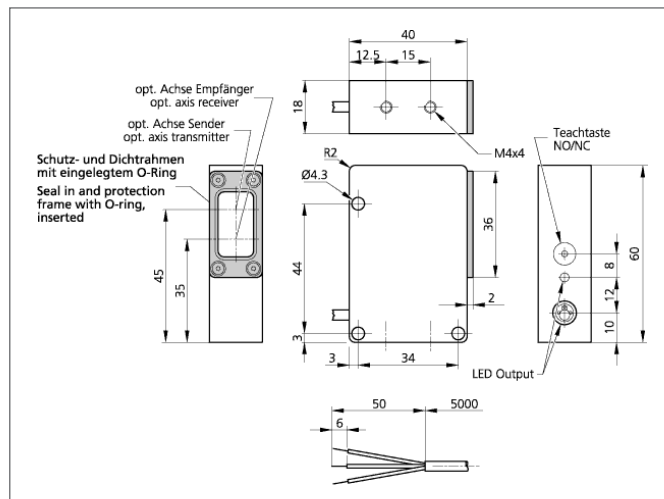

TECHNICAL INFORMATION	
Size	+20°C, 24V DC 60 x 41 x 18 mm (Dimensions)
Design	cuboid design
Emitted light	Red, 660 nm, clocked
Operating distance	40 ... 2.000 mm
Service voltage	10 ... 35 V DC
Referring reflector	100 x 100 mm
Output	NO/NC
Sensitivity adjustment	teach button
Internal power consumption	< 40 mA
Operating frequency	1.000 Hz
Ambient temperature	-10 ... +60 °C
Ambient light immunity	> 20 kLx
Protection class	IP 69K
Casing material	stainless steel
Material	polymethyl methacrylate (Window)
Connection	Cable, 5.000 mm