


OTV 05 V 50 N1K-TSSL

Diffuse Sensor

- Small design
- Infrared light, clocked
- High resolution
- Functional reserve

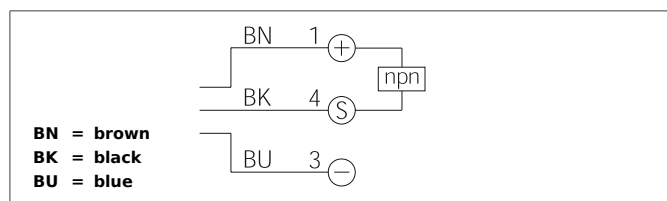


Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.

These instruments shall exclusively be used by qualified personnel.

Repair only by di-soric.

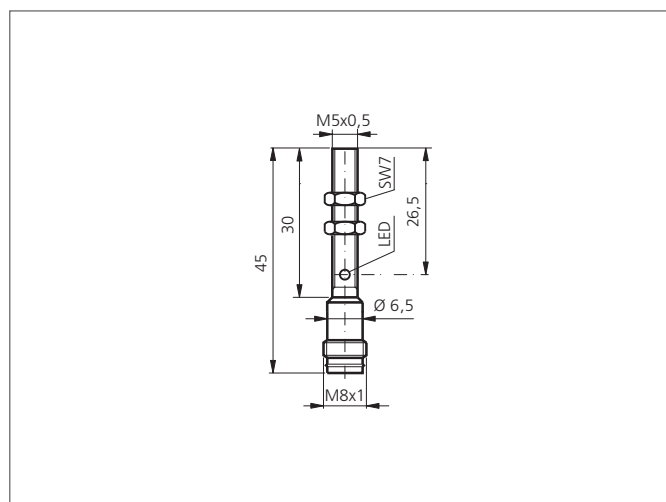

TECHNICAL INFORMATION		+20°C, 24V DC
Operating principle		Diffuse reflective sensor
Evaluation		digital
Size		M5 (Gewinde)
Design		cylinder
Emitted light		Infrared, 880 nm, clocked
Standardized measuring plate		100 x 100 mm, white
Service voltage		10 ... 36 V DC
Operating distance		50 mm
Output		npn, 100 mA, NO
Sensitivity adjustment		no setting elements
Internal power consumption		< 15 mA
Voltage drop		< 2,0 V
Operating frequency		250 Hz
Response-/release time		< 2,5 ms / < 2,5 ms
Switching hysteresis		10 %
Ambient temperature		0 ... +55 °C
Ambient light immunity		> 10.000 Lux
Protection class		IP 67
Protection degree		III, operation on protective low voltage
Casing material		stainless steel
Material		glass (Window)
Connection		Connector, M8, 3-poled