


OHT 41 M 0.2 G3-T3


Diffuse Sensor with Background Suppression

- High operating distances with a small design
- Plug, rotatable 270°
- Dovetail groove for secure mounting
- NO/NC changeover by teach button
- Auto and two-point teach procedures
- Visible red light with small light spot
- Small metal casing design
- Display for unstable function

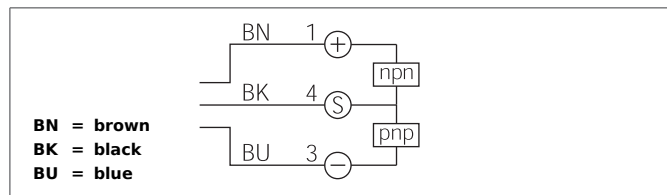

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.
These instruments shall exclusively be used by qualified personnel.
Repair only by di-soric.

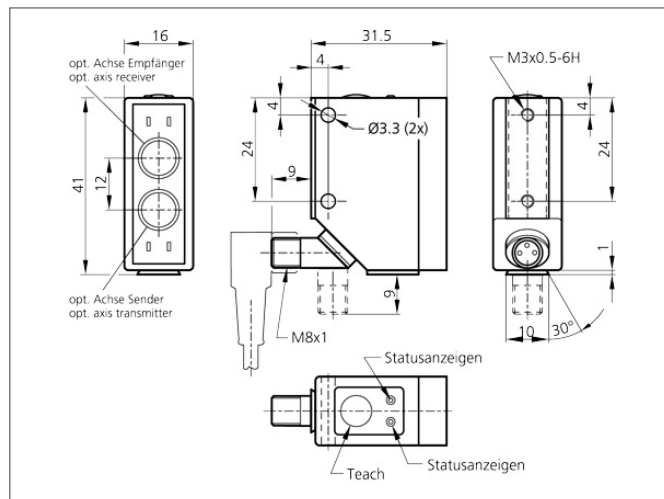

TECHNICAL INFORMATION	
Evaluation	+20°C, 24V DC digital
Size	41 x 31,5 x 16 mm (Dimensions)
Design	cuboid design
Emitted light	Red, 630 nm, clocked
Service voltage	10 ... 30 V DC
background suppression	yes
Operating distance	40 ... 200 mm
Output	Push pull, 200 mA, NO/NC, switchable
Sensitivity adjustment	teach button
Internal power consumption	< 40 mA
Voltage drop	< 2,0 V
Operating frequency	500 Hz
Ambient temperature	0 ... +50 °C
Protection class	IP 67
Casing material	die-cast zinc black lacquered finish
Material	polymethyl methacrylate (Window)
Connection	M8, 3-poled