



M18

Rött synligt, polariserat, modulerat

2 m

BN - Brun
BK - Svart
WH - Vit
BU - Blå

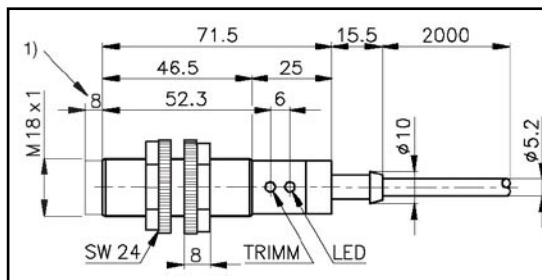

2218-001	2218-003
PA18CSP20PAM1	PA18CSP20PA
2218-002	2218-004
PA18CSP20NAM1	PA18CSP20NA

2218-005	2218-007
PA18CLP20TCM6	PA18CLP20TC
2218-006	2218-008
PA18CLP20TOM6	PA18CLP20TO

	AC		AC
2000 mm	2000 mm	2000 mm	2000 mm (justerbar)
Rött 660 nm	Rött 660 nm	Rött 660 nm	Rött 660 nm
10-40 VDC (inkl. rippel)	20-250 VAC	10-40 VDC (inkl. rippel)	20-250 VAC
200 mA	500 mA	200 mA	500 mA
<20 mA	-	<20 mA	-
< 2,5 VDC	< 10 VAC	< 2,5 VDC	< 10 VAC
100 Hz	20 Hz	100 Hz	20 Hz
3...20% av avkänningsavst.	3...20% av avkänningsavst.	3...20% av avkänningsavst.	3...20% av avkänningsavst.
<10%		<10%	
-20...+60°C	-20...+60°C	-20...+60°C	-20...+60°C
IP 67	IP 67	IP 67	IP 67
Ja	-	Ja	-
Ja	Ja	Ja	Ja
Ja	Ja	Ja	Ja
LED	LED	LED	LED
Termoplastik polyester	Termoplastik polyester	Termoplastik polyester	Termoplastik polyester
M12-kontakt	M12-kontakt	2m PVC-kabel	2m PVC-kabel
CE, UL , CSA	CE, UL , CSA	CE, UL , CSA	CE, UL , CSA