
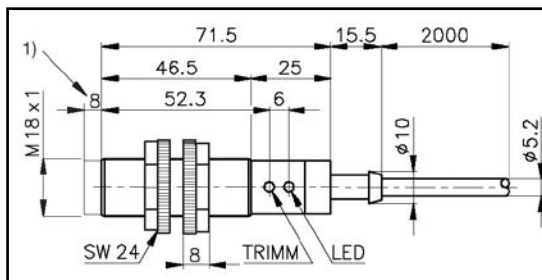






M18

Infraött, modulerat

3 m

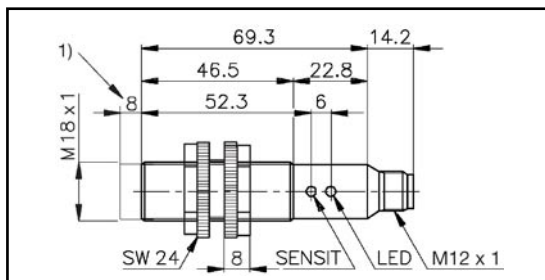

- antivalent utgång
- kortslutningsskydd
- Felpolariseringsskydd



BN - Brun
BK - Svart
WH - Vit
BU - Blå

2218-017	2218-019
PA18CSR30PAM1	PA18CSR30PA
2218-018	2218-020
PA18CSR30NAM1	PA18CSR30NA

2218-021	2218-023
PA18CLR30TCM6	PA18CLR30TC
2218-022	2218-023
PA18CLR30TOM6	PA18CLR30TO

	AC		AC
3000 mm	3000 mm	3000 mm	3000 mm (justerbar)
IR 880 nm	IR 880 nm	IR 880 nm	IR 880 nm
10-40 VDC (inkl. rippel)	20-250 VAC	10-40 VDC (inkl. rippel)	20-250 VAC
200 mA	500 mA	200 mA	500 mA
<20 mA	-	<20 mA	-
< 2,5 VDC	< 10 VAC	< 2,5 VDC	< 10 VAC
120 Hz	20 Hz	120 Hz	20 Hz
3...20% av avkänningsavst.	3...20% av avkänningsavst.	3...20% av avkänningsavst.	3...20% av avkänningsavst.
<10%		<10%	
-20...+60°C	-20...+60°C	-20...+60°C	-20...+60°C
IP 67	IP 67	IP 67	IP 67
Ja	-	Ja	-
Ja	Ja	Ja	Ja
Ja	Ja	Ja	Ja
LED	LED	LED	LED
Termoplastik polyester	Termoplastik polyester	Termoplastik polyester	Termoplastik polyester
M12-kontakt	M12-kontakt	2m PVC-kabel	2m PVC-kabel
CE, UL , CSA	CE, UL , CSA	CE, UL , CSA	CE, UL , CSA