

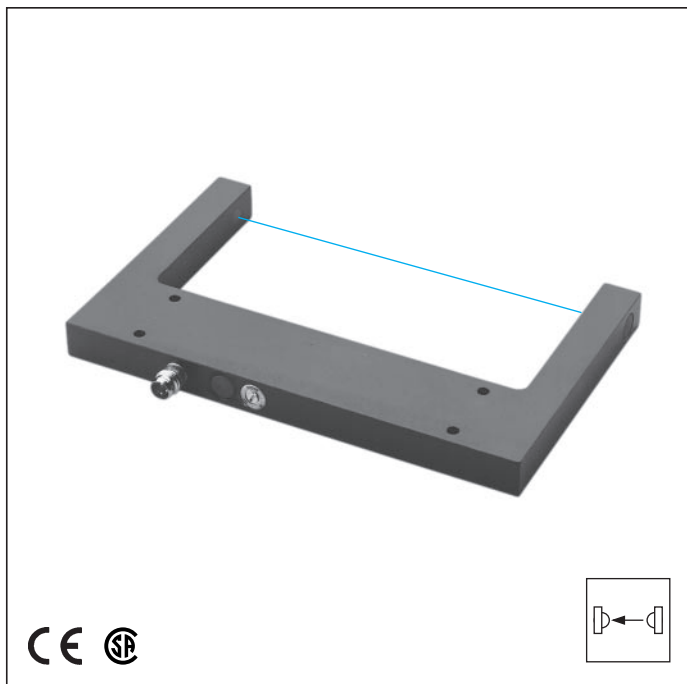


OGU 120 ... / OGU 121 ...

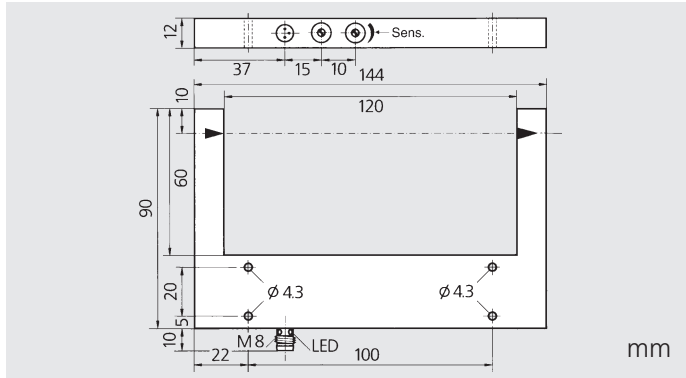

OGU 120/205 ... / OGU 121/205 ...

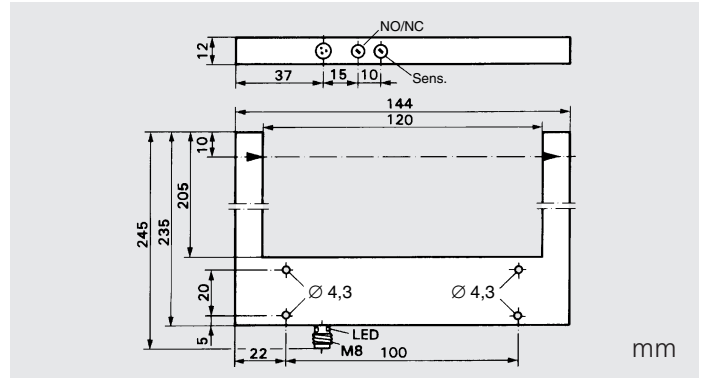

getaktet / clocked

120 mm
10 ... 35 V DC
pnp / npn
200 mA, kurzschlussfest / short-circuit-proof
 $\leq 45 \text{ mA}$ / $\leq 40 \text{ mA}$
 $\leq 2,0 \text{ V}$ / $\leq 2,8 \text{ V}$
2 kHz
 $\varnothing 2,0 \text{ mm}$ / $\varnothing 0,8 \text{ mm}$
 $\leq 0,2 \text{ mm}$ / $\leq 0,25 \text{ mm}$
0,06 mm
-10 ... +60 °C
20 kLux / 50 kLux
500 V
IP 67
Zinkdruckguss, schwarz lackiert / die-cast zinc, black lacquered finish

Typ / Model

OGU 120 P3K-TSSL
OGU 120 N3K-TSSL
OGU 121 P3K-TSSL
OGU 121 N3K-TSSL
TK ...

getaktet / clocked

120 mm
10 ... 35 V DC
pnp / npn
200 mA, kurzschlussfest / short-circuit-proof
 $\leq 45 \text{ mA}$ / $\leq 40 \text{ mA}$
 $\leq 2,0 \text{ V}$ / $\leq 2,8 \text{ V}$
2 kHz
 $\varnothing 2,0 \text{ mm}$ / $\varnothing 0,8 \text{ mm}$
 $\leq 0,2 \text{ mm}$ / $\leq 0,25 \text{ mm}$
0,06 mm
-10 ... +60 °C
20 kLux / 50 kLux
500 V
IP 67
Alu, schwarz eloxiert / aluminium, black anodized

Typ / Model

OGU 120/205 P3K-TSSL
OGU 120/205 N3K-TSSL
OGU 121/205 P3K-TSSL
OGU 121/205 N3K-TSSL
TK ...