
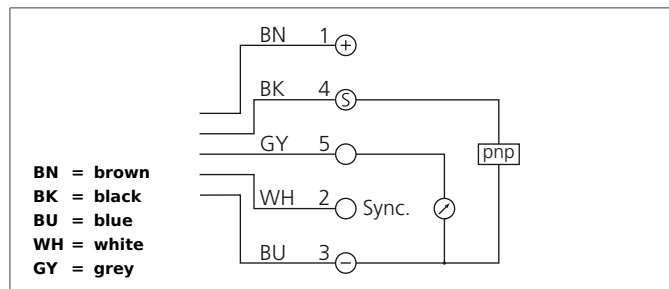


USC 30 M 3000 I4/20PSK-BSL


Ultrasonic Sensor

- Integrated temperature compensation
- Operating mode ultrasonic diffuser or ultrasonic barrier settable via PC sensor interface (not included)
- Switching output and analog output
- Synchronisation/release input
- Scanning range adjustable via potentiometer or PC sensor interface
- Insensitive to dirt and ambient noise
- Metal casing
- High protection class

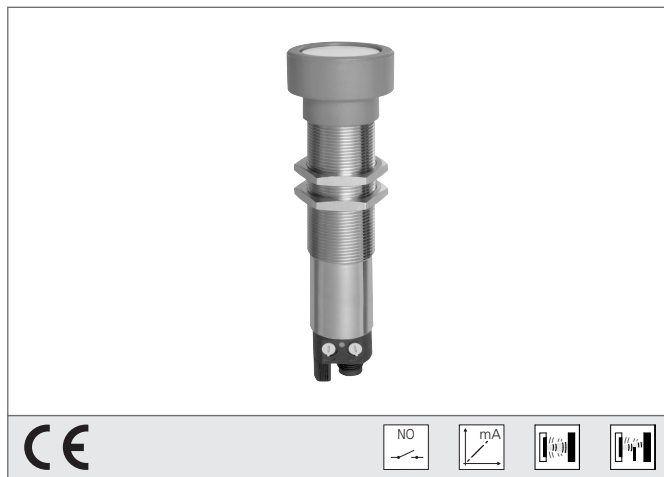

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.
 These instruments shall exclusively be used by qualified personnel.
 Repair only by di-soric.

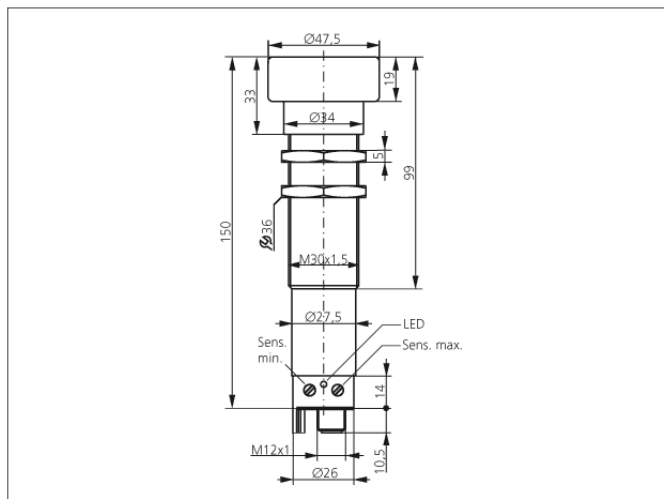

TECHNICAL INFORMATION		+20°C, 24V DC
Operating principle		Ultrasonic sensor, Ultrasonic barrier
Size		M30 x 1,5 (Gewinde)
Design		screw
Standardized measuring plate		50 x 50 mm
Service voltage		12 ... 30 V DC
Operating distance		400 ... 3.000 mm
Adjustment range		420 ... 3.000 mm
Switching output		Transistor pnp, 300 mA, NO + analog
Analog output		4 ... 20 mA, Load / < 500 Ω
Operating frequency		120.000 Hz
Sensitivity adjustment		potentiometer
Internal power consumption		< 60 mA
Operating frequency		< 2 Hz
Accuracy		1,5 %
Response-/release time		0,2 s
Switching hysteresis		20 mm
Reproducibility		5 mm
Ambient temperature		-25 ... +70 °C
Insulation voltage endurance		500 V
Protection class		IP 65
Casing material		brass nickel plated
Material		PBTP (Crastin) (Transducer enclosure) epoxy resin (Transducer surface)

USC 30 M 3000 I4/20PSK-BSL

Ultrasonic Sensor

TECHNICAL INFORMATION	
Connection	+20°C, 24V DC Connector, M12, 5-poled