

SACCBP-FS-5CON-M16/1,0-PUR SCO

Order No.: 1419328



Flush-type socket, shielded, 5-pos., M12, A-coded, rear/screw
mounting with M16 thread, with 1 m line, 5 x 0.34 mm²



Commercial data

EAN	 4 046356 533294
Note	Made-to-order
Pack	1
Customs tariff	85444290
Catalog page information	Page 110 (NTK-2010)

Technical data

General data

Rated current at 40°C	4 A
Rated voltage	60 V
Number of positions	5
Volume resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ
Length of cable	1 m
Ambient temperature (operation)	-25 °C ... 85 °C (Male connector / female connector)

General characteristics

Standards/regulations	M12 connector IEC 61076-2-101
-----------------------	-------------------------------


Coding	A - standard
Surge voltage category	II
Pollution degree	3
Degree of protection	IP67
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA 66
Material, knurls	Zinc die-cast, (nickel-plated)
Sealing material	NBR
Mounting type	Rear mounting M16 x 1.5 With flat nut
Type of connection	Free cable end
Status display	No

Conductor data


Cable type	PUR halogen-free black
Cable abbreviation	Li9Y-V1-C-V1-11Y
AWG signal line	22
External cable diameter	5.90 mm
Wire colors	Brown, white, blue, black, gray
External sheath, color	Black-gray RAL 7021
Overall twist	5 wires around filler to the core
Shielding	Braided copper wires
Optical shield covering	85 %
Outer sheath, material	PUR
Material, filler	PE
Conductor material	Bare Cu litz wires
Cable weight	48 kg/km
Ambient temperature (operation)	-30 °C ... 85 °C (cable, fixed installation)

Drawings

Dimensioned drawing

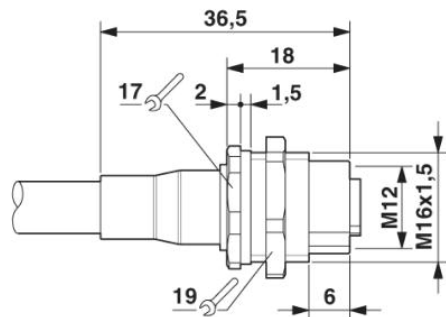


M12 flush-type connector

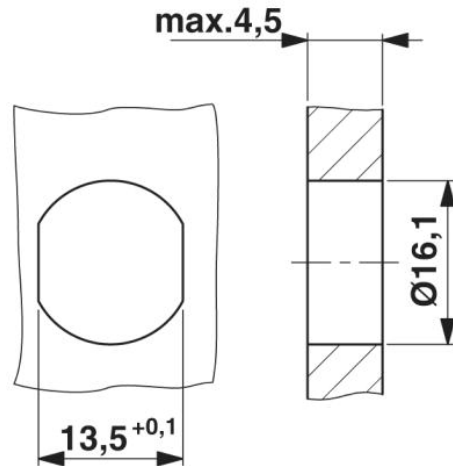

Housing cutout for M16 fastening thread, mounting panel with feed-through hole (alternatively with surface as protection against rotation)

Circuit diagram

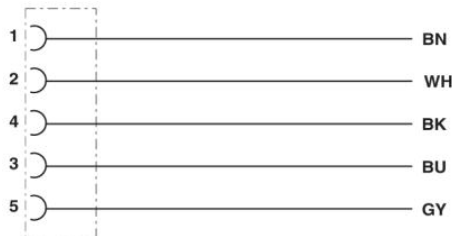

Contact assignment of the M12 socket

Schematic diagram

Pin assignment M12 socket, 5-pos., A-coded, socket side view

