

SACC-DSI-M12MSB-5CON-M16/0,5

Order No.: 1419661



Sensor/actuator flush-type connector, 5-pos., M12 SPEEDCON, B-encoded, rear/screw mounting with M16 thread, with 0.5 m TPE litz wire, 5 x 0.34 mm²



Product notes

WEEE/RoHS-compliant since:
2010-02-25



Commercial data

EAN	 4 046356 533515
Note	Made-to-order
Pack	1
Customs tariff	85444290
Catalog page information	Page 107 (NTK-2010)

Technical data

General data

Rated current at 40°C	4 A
Rated voltage	60 V
Number of positions	5
Volume resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ
Length of cable	0.5 m

General characteristics


Standards/regulations	M12 connector IEC 61076-2-101
Coding	B - inverse
Surge voltage category	II
Pollution degree	3
Degree of protection	IP67
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA 66
Material, knurls	Zinc die-cast, (nickel-plated)
Sealing material	NBR
Mounting type	Rear mounting M16 x 1.5 With flat nut
Type of connection	Individual wires
Status display	No

Conductor data


Cable type	TPE litz wire
Conductor cross section	0.34 mm ²
AWG signal line	22
Core diameter including insulation	1.2 mm ±0.07 mm
Thickness, insulation	0.21 mm
Wire colors	Black, brown, blue, white, gray
Insulation resistance	≥ 20 MΩ*km
Conductor resistance	≤ 57.6 mΩ/m
Nominal voltage, conductor	300 V
Test voltage, conductor	2000 V AC
Conductor material	Tin-plated Cu litz wires

Drawings


Dimensioned drawing

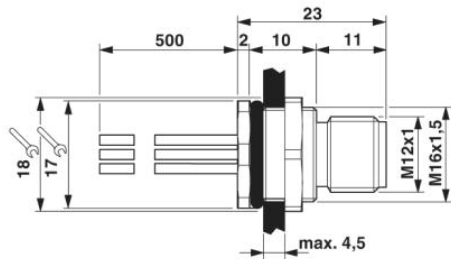

M12 flush-type connector

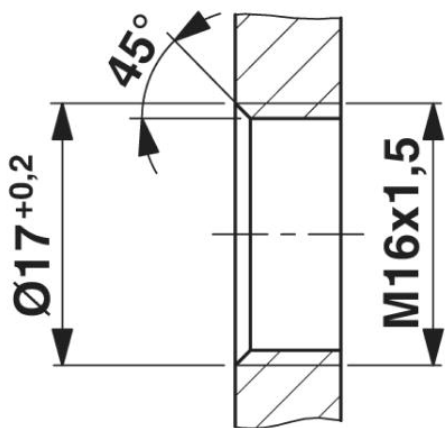


Housing cutout for M16 fastening thread, mounting panel with thread

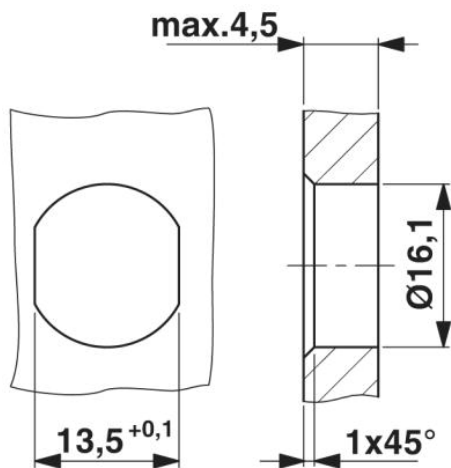


Housing cutout for M16 fastening thread, mounting panel with feed-through hole (alternatively with surface as protection against rotation)

Circuit diagram

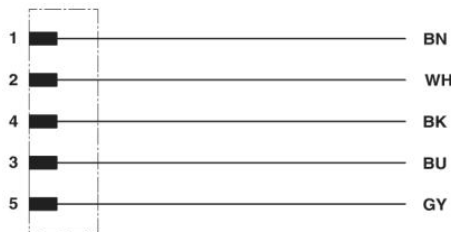

Contact assignment of the M12 plug

Schematic diagram

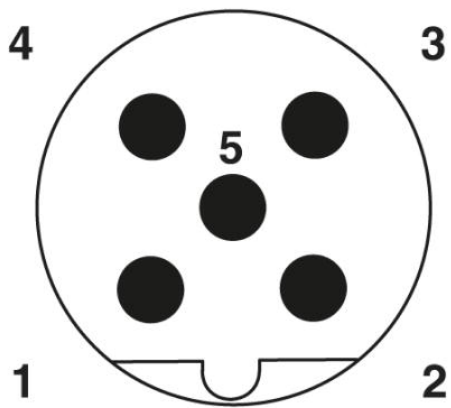

Pin assignment M12 male connector, 5-pos., B-coded, male side