

SAC-17P-MR/ 1,5-35T SH SCO

Order No.: 1430242



Sensor/Actuator cable, 17-position, PUR/PVC, Black RAL 9005, shielded, Plug, angled M12-SPEEDCON, A-coded, on Free conductor end, Cable length: 1.5 m



Commercial data	
EAN	 4 046356 322515
Note	Made-to-order
Pack	1
Customs tariff	85444290
Catalog page information	Page 99 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
2007-10-10



Technical data

General data

Rated current at 40°C	1.5 A
Rated voltage	30 V
Number of positions	17
Volume resistance	$\leq 5 \text{ m}\Omega$
Insulation resistance	$\geq 100 \text{ M}\Omega$
Length of cable	1.5 m

Stripping length of the free conductor end	35 mm
Ambient temperature (operation)	-25 °C ... 90 °C (Male connector / female connector)

General characteristics

Standards/regulations	M12 connector IEC 61076-2-101
Coding	A - standard
Surge voltage category	II
Pollution degree	3
Degree of protection	IP65/IP68/IP69K
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	PA 66
Material of grip body	TPU, hardly inflammable, self-extinguishing
Material, knurls	Zinc die-cast, (nickel-plated)
Status display	No


Conductor data

Cable type	Black PUR/PVC twisted pair
Cable type (abbreviation)	35T
Conductor cross section	0.14 mm ²
AWG signal line	26
Conductor structure signal line	18x 0.10 mm
Core diameter including insulation	1 mm ±0.05 mm
External cable diameter	9.20 mm
Wire colors	White-brown, green-yellow, gray-pink, blue-red, black-violet, gray/ pink-red/blue, white/green-brown/green, white/yellow-yellow/ brown-white/gray
External sheath, color	Black RAL 9005
Conductor resistance	142 Ω/km
Overall twist	Eight pairs around the filler to the core
Shielding	Tinned copper braided shield
Optical shield covering	85 %
Outer sheath, material	PUR
Material, inner sheath	PVC
Material conductor insulation	PVC
Conductor material	Tin-plated Cu litz wires
Number of bending cycles	2000000

Bending radius	92 mm
Traversing path	10 m
Traversing rate	3 m/s
Acceleration	10 m/s ²
Ambient temperature (operation)	-40 °C ... 80 °C (cable, fixed installation) -5 °C ... 80 °C (cable, flexible installation)
Flame resistance	DIN VDE 0472 part 804, test type B
Resistance to oil	DIN VDE 0472 Part 803, test type B
Other resistance	Hydrolysis and microbe resistant as per VDE 0282 section 10


Drawings

Dimensioned drawing

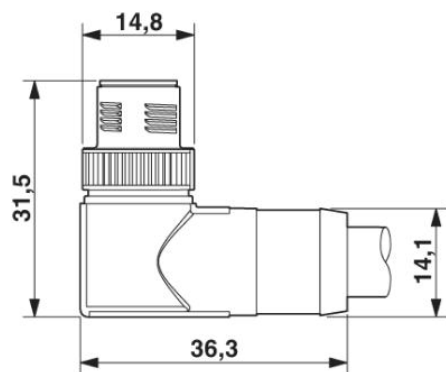

Plug M12 SPEEDCON, angled, shielded

Circuit diagram

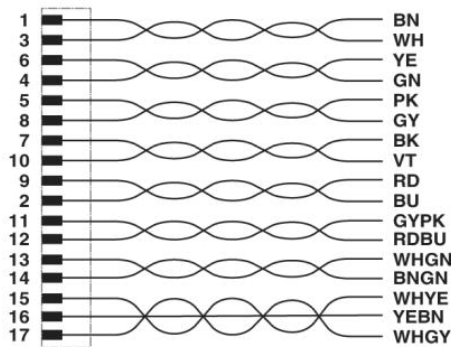

Contact assignment of the M12 plug

Schematic diagram

Pin assignment M12 male connector, 17-pos., male side view

