

SACC-E-M 8MS-5CON-M 8/0,5 DN

Order No.: 1440119



Bus system flush-type connector, connector, DeviceNet, 5-pos., M8, front/screw mounting with M8 thread, with 0.5 m PVC litz wire, 5 x 0.25 mm²

Commercial data

EAN	 4 046356 481328
Pack	1
Customs tariff	85444290
Catalog page information	Page 22 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
2008-12-16



Technical data

General data

Rated current at 40°C	4 A
Rated voltage	60 V
Number of positions	5
Volume resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ
Length of cable	0.5 m

Ambient temperature (operation)	-20 °C ... 105 °C
---------------------------------	-------------------

General characteristics


Standards/regulations	M8 connector IEC 61076-2-104
Degree of protection	IP65/IP68
Contact material	CuSn
Contact surface material	Au
Contact carrier material	PBT
Material, knurls	Nickel-plated brass
Sealing material	Viton
Mounting type	Front mounting M8 x 0.5 With flat nut
Type of connection	Individual wires
Status display	No

Conductor data

Cable type	PVC litz wire
Conductor cross section	0.25 mm ²
Wire colors	Gray, red, white, black, blue
Material conductor insulation	PVC


Drawings

Dimensioned drawing

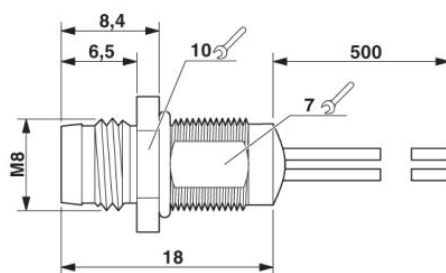

M8 flush-type connector, front mounting

Schematic diagram

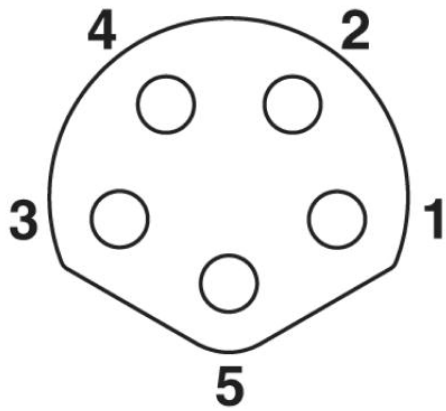

Pin assignment M8 male connector, 5-pos., B-coded, view male side