

SACC-SQ-M12FS-8CON-25F/0,5

Order No.: 1441574



Sensor/actuator flush-type socket, 8-pos., M12, A-encoded, front/
square flange mounting, with 0.5 m TPE litz wire, 8 x 0.25 mm²



Commercial data

EAN	 4 046356 533881
Pack	1
Customs tariff	85444290
Catalog page information	Page 106 (NTK-2010)

Product notes

WEEE/RoHS-compliant since:
2010-02-25



Technical data

General data

Rated current at 40°C	2 A
Rated voltage	30 V
Number of positions	8
Volume resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ
Length of cable	0.5 m

Ambient temperature (operation)	-25 °C ... 85 °C (Male connector / female connector)
---------------------------------	--

General characteristics


Standards/regulations	M12 connector IEC 61076-2-101
Coding	A - standard
Surge voltage category	II
Pollution degree	3
Degree of protection	IP67
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	PA 66
Material, knurls	Zinc die-cast, (nickel-plated)
Sealing material	NBR
Mounting type	Front mounting Square flange
Type of connection	Individual wires
Status display	No

Conductor data


Cable type	TPE litz wire
Conductor cross section	0.25 mm ²
AWG signal line	24
Wire colors	Brown, blue, white, gray, pink, green, yellow, red
Conductor material	Tin-plated Cu litz wires
Ambient temperature (operation)	-25 °C ... 90 °C (cable, fixed installation)

Drawings

Dimensioned drawing

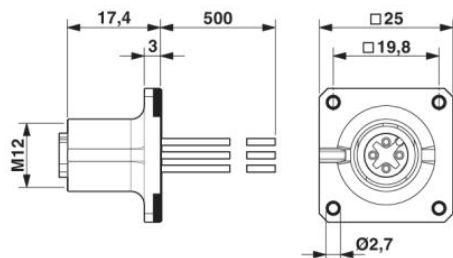


Circuit diagram

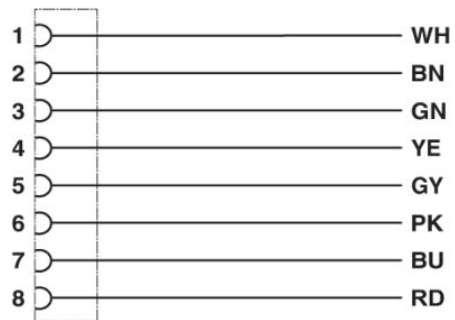

Contact assignment of the M12 plug and the M12 socket

Schematic diagram

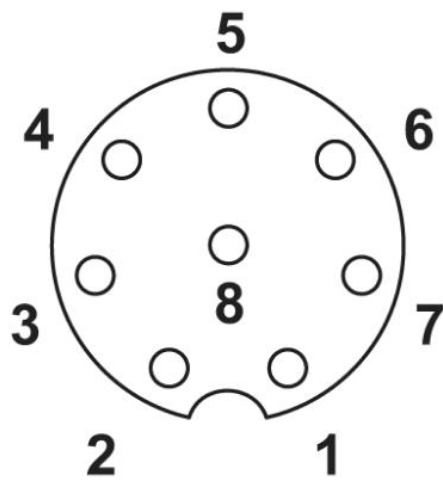

Pin assignment M12 socket, 8-pos., A-coded, view female side