

SAC-M12T/2XM12 CAN

Order No.: 1507793



Bus system T-connector, 5-pos., DeviceNet™/CANopen, M12 socket
to M12 socket and M12 plug

Commercial data

EAN	 4 017918 900397
Pack	1
Customs tariff	85444290
Catalog page information	Page 88 (NTK-2005)

Product notes

WEEE/RoHS-compliant since:
2006-01-01



Technical data

General data

Rated current at 40°C	4 A
Rated voltage	60 V
Number of positions	5
Volume resistance	≤ 5 mΩ
Insulation resistance	≥ 1 GΩ


General characteristics

Coding	A - standard
Surge voltage category	II

Pollution degree	3
Degree of protection	IP68
Insertion/withdrawal cycles	≥ 100
Contact material	Cu alloy
Contact surface material	Ni/Au
Contact carrier material	PUR
Material of grip body	PUR
Material, knurls	Nickel-plated brass
Sealing material	Viton
Status display	No
Test voltage	1500 V


Drawings

Dimensioned drawing

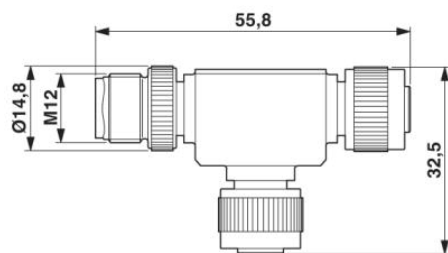


M12 T-distributor

Circuit diagram

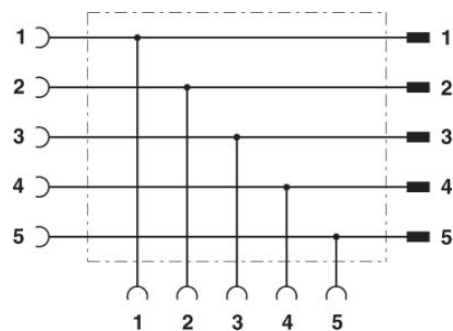


Contact assignment of the M12 plug and the M12 socket

Schematic diagram

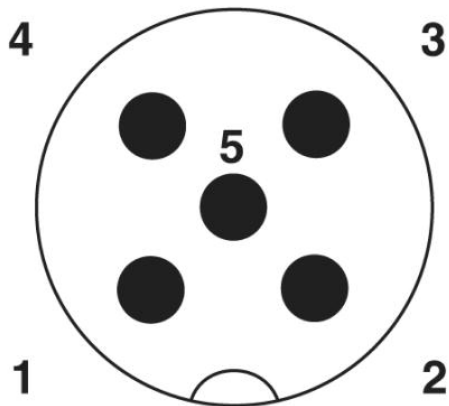

Pin assignment M12 male connector, 5-pos., A-coded, male side

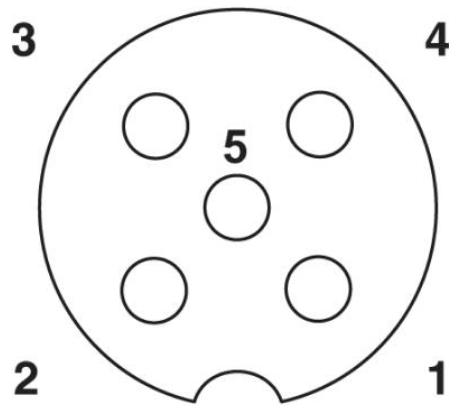

Pin assignment M12 socket, 5-pos., A-coded, socket side view