

SAC-5P-M12MS CAN TR

Order No.: 1507816



Terminating resistor CANopen/DeviceNet™ M12

Commercial data

EAN	 4 017918 900410
Pack	5
Customs tariff	85366990
Catalog page information	Page 296 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
2005-11-22



Technical data

General data

Rated current at 40°C	4 A
Rated voltage	60 V
Number of positions	5
Ambient temperature (operation)	-25 °C ... 90 °C (connector)

General characteristics

Coding	A - standard
--------	--------------

Surge voltage category	II
Pollution degree	3
Degree of protection	IP65/IP67/IP69K
Insertion/withdrawal cycles	≥ 100
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material of grip body	TPU, hardly inflammable, self-extinguishing
Material, knurls	Zinc die-cast, (nickel-plated)
Status display	No

Certificates




Certification

GOST


Drawings

Dimensioned drawing

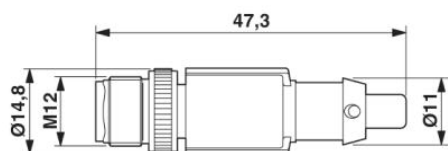


M12 x 1 male connector, straight

Circuit diagram

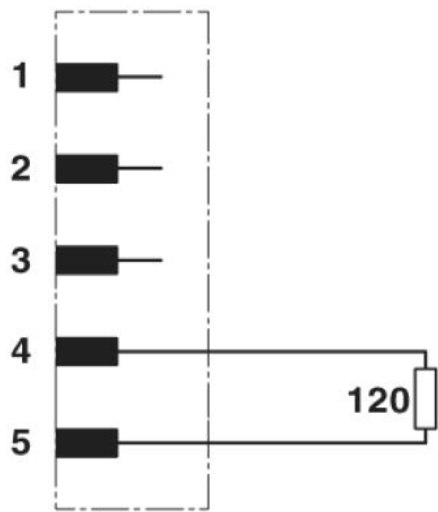

Internal wiring of connections

Schematic diagram

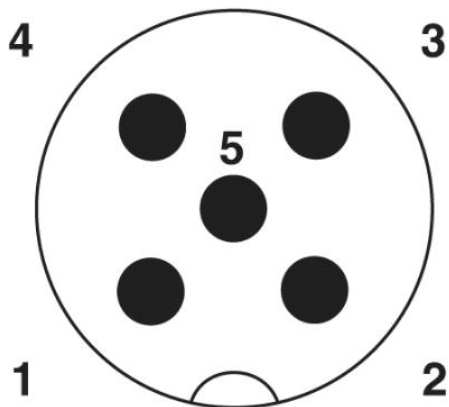

Pin assignment M12 male connector, 5-pos., A-coded, male side