

SAC-3P-M12Y/2XM12FS B PE S21

Order No.: 1514016

The illustration shows the green standard version



Y-distributor, 3-pos. +PE, straight M12 plug on 2 x straight M12
socket, PIN 2+4 bridged, inner gauge of 21 mm

Commercial data

EAN	 4 017918 943523
Note	Made-to-order
Pack	5
Customs tariff	85444290
Catalog page information	Page 110 (PC-2005)

Product notes

WEEE/RoHS-compliant since:
2009-01-05



Technical data

General data

Rated current at 40°C	4 A
Rated voltage	60 V
Number of positions	3
Volume resistance	≤ 5 mΩ
Insulation resistance	≥ 100 MΩ
Ambient temperature (operation)	-25 °C ... 90 °C (Male connector / female connector)

General characteristics

Standards/regulations	M12 connector IEC 61076-2-101
Coding	A - standard
Center distance	21 mm
Surge voltage category	II
Pollution degree	3
Degree of protection	IP65/IP68/IP69K
Insertion/withdrawal cycles	≥ 100
Torque	0.4 Nm
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material of grip body	TPU, hardly inflammable, self-extinguishing
Material, knurls	Zinc die-cast, (nickel-plated)
Sealing material	NBR
Status display	No

Certificates

Certification

CUL Listed, UL Listed

Accessories

Item	Designation	Description
------	-------------	-------------

Protection and sealing elements

1680539	PROT-M12	An M12 screw plug for the unoccupied M12 sockets of the sensor/ actuator cable, boxes and flush-type connectors
1560251	PROT-M12 FS	M12 sealing cap for unoccupied M12 connectors of the sensor/ actuator cable, flush-type connectors and I/O devices in the field


Tools

1208432	SAC BIT M12-D15	Nut for assembling sensor/actuator cables with M12 connector and for M12 connectors with QUICKON fast connection technology, for 4 mm hexagonal drive
---------	-----------------	---

1208429	TSD 04 SAC	Torque screwdriver, with preset torque of 0.4 Nm and 4 mm hexagonal drive for M12 connectors
---------	------------	--


Drawings

Dimensioned drawing

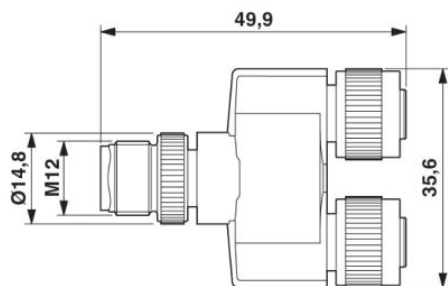


Connector M12 x 1, Y distributor, inner gauge of 21 mm

Circuit diagram

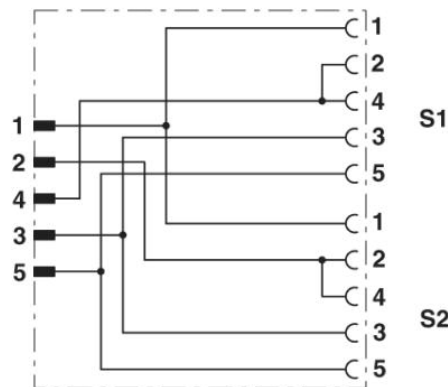


Contact assignment of the M12 Y-distributor

Schematic diagram

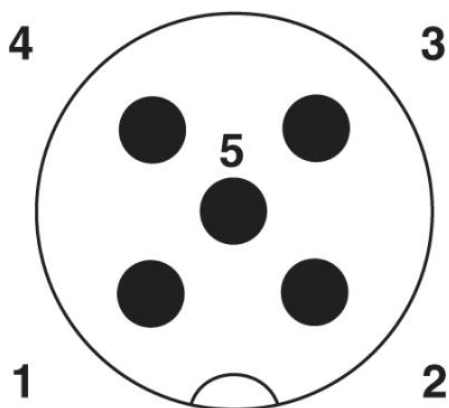

Pin assignment M12 male connector, 5-pos., A-coded, male side

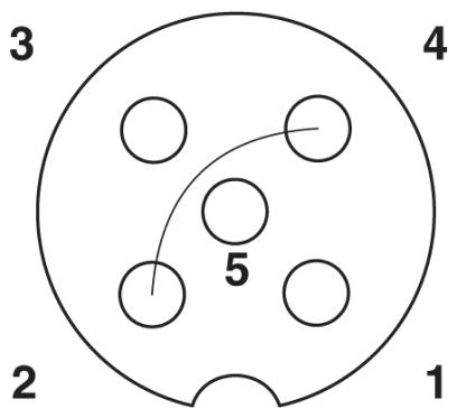

Connector pin assignment M12 socket, 3-pos., bridged, with PE, A-coded, female side view