

SAC-3P-M 8MS-M12FS

Order No.: 1519749



Adapter, from M8 male connector to M12 female connector, 3-pos.

Commercial data

EAN	 4 046356 019934
Pack	1
Customs tariff	85366990
Catalog page information	Page 105 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
2008-01-01



Technical data

General data

Rated current at 40°C	4 A
Rated voltage	60 V
Number of positions	3
Volume resistance	$\leq 5 \text{ m}\Omega$
Insulation resistance	$\geq 100 \text{ M}\Omega$
Ambient temperature (operation)	-25 °C ... 90 °C

General characteristics

Standards/regulations	M12 connector IEC 61076-2-101
Coding	A - standard
Surge voltage category	II
Pollution degree	3
Degree of protection	IP65/IP67
Insertion/withdrawal cycles	≥ 100
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material of grip body	TPU, hardly inflammable, self-extinguishing
Material, knurls	Zinc die-cast, (nickel-plated)
Sealing material	NBR
Status display	No

Certificates

Certification

CUL Listed, UL Listed

Accessories

Item	Designation	Description
------	-------------	-------------

Protection and sealing elements

1680539	PROT-M12	An M12 screw plug for the unoccupied M12 sockets of the sensor/ actuator cable, boxes and flush-type connectors
---------	----------	---


Tools

1208432	SAC BIT M12-D15	Nut for assembling sensor/actuator cables with M12 connector and for M12 connectors with QUICKON fast connection technology, for 4 mm hexagonal drive
1208461	SAC BIT M8-D10	Nut for assembling sensor/actuator cables with M8 connector and for M8 connectors with QUICKON fast connection technology, for 4 mm hexagonal drive
1208487	TSD 02 SAC	Torque screwdriver, with preset torque of 0.2 Nm and 4 mm hexagonal drive for M8 connectors


1208429	TSD 04 SAC	Torque screwdriver, with preset torque of 0.4 Nm and 4 mm hexagonal drive for M12 connectors
---------	------------	--

Drawings

Dimensioned drawing

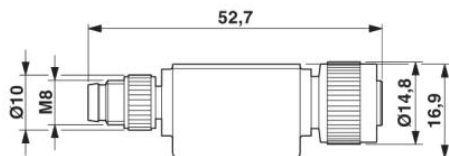


Circuit diagram

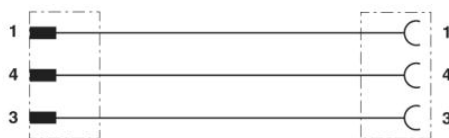


Contact assignment of M8 plugs / M12 sockets

Schematic diagram

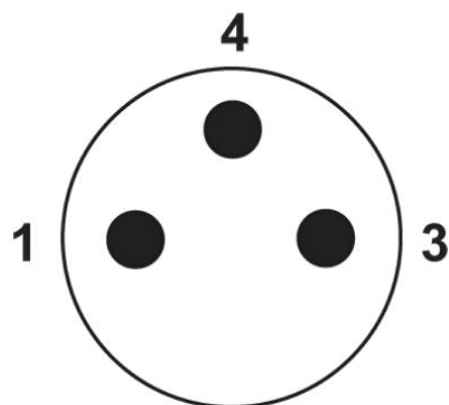

Pin assignment M8 plug, 3-pos., view male side

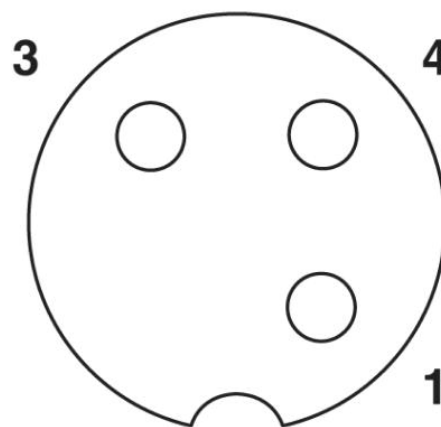

Pin assignment M12 socket, 3-pos., A-coded, view female side

Layout of connector pin assignments

