

SACC-E-MINFS-4CON-PG13/0,5

Order No.: 1521423



Sensor-/Aktor-Einbaubuchse, 4-polig, 7/8", Vorderwandmontage mit Pg13,5-Befestigungsgewinde, mit 0,5 m PVC-Litze, 4 x 0,75 mm²

Commercial data

EAN	 4 017918 949648
Pack	1
Customs tariff	85366990
Catalog page information	Page 39 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
2006-03-17



Technical data

General data

Rated current at 40°C	9 A
Rated voltage	250 V
Number of positions	4
Volume resistance	≤ 5 mΩ
Insulation resistance	≥ 100 MΩ
Length of cable	0.5 m
Ambient temperature (operation)	-40 °C ... 85 °C (female)

General characteristics

Surge voltage category	II
Pollution degree	3
Degree of protection	IP67
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PUR
Material, knurls	Zinc die-cast, (nickel-plated)
Sealing material	Viton
Mounting type	Front mounting Pg13.5
Type of connection	Individual wires
Status display	No

Conductor data

Cable type	PVC litz wire
Conductor cross section	0.75 mm ²
AWG signal line	18
Conductor structure signal line	24x 0.20 mm
Core diameter including insulation	2.7 mm
Thickness, insulation	0.85 mm (Core insulation)
Wire colors	Black, brown, blue, white
Material conductor insulation	PE
Ambient temperature (operation)	-40 °C ... 85 °C (cable, fixed installation)


Certificates

Certification


CUL, UL

Drawings

Dimensioned drawing

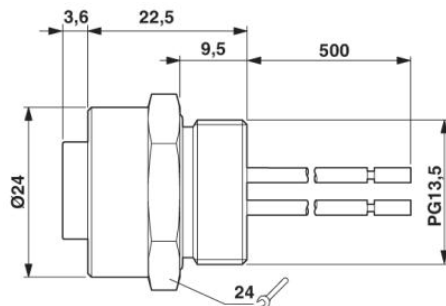


7/8" flush-type connector

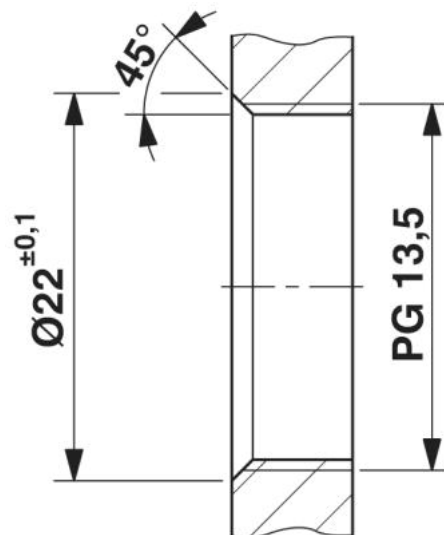


Mounting panel with thread

Mounting panel with feed-through hole

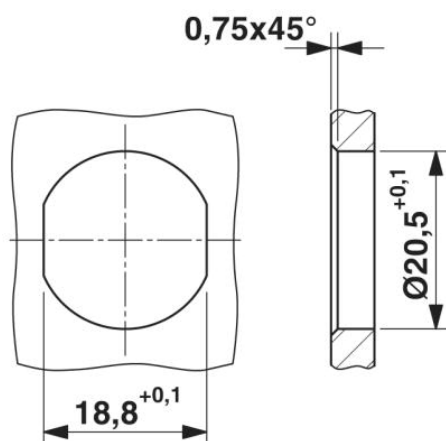

Schematic diagram

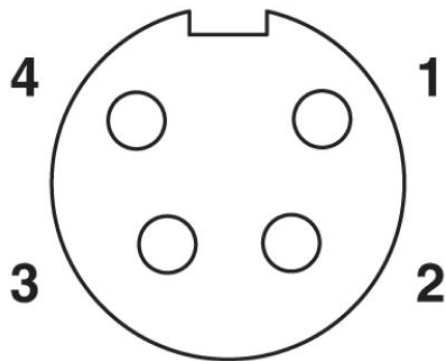

Pin assignment, socket, 7/8"-16UNF, 4-pos., view of female side