

SACC-V-3CON-PG9/A-1L-SV 240V

Order No.: 1527935



Valve connector, 3-pos., type A, 1 LED, with protective circuit, screw connection, cable screw connection Pg9

Commercial data

EAN



Pack

1

Customs tariff

85369010

Catalog page information

Page 110 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
2006-02-21



Technical data

General data


Rated current at 40°C	10 A
Rated voltage	240 V
Number of positions	3
Volume resistance	$\leq 15 \text{ m}\Omega$
Insulation resistance	$\geq 100 \text{ M}\Omega$
Ambient temperature (operation)	-25 °C ... 85 °C (valve plug)

General characteristics

Surge voltage category	II
Pollution degree	3
Degree of protection	IP65
Contact material	CuSn
Contact surface material	Ni
Valve plug contact insert material	PA6
Material, housing, valve plug	PA6
Sealing material	NBR
Connection method	Screw connection
Conductor cross section stranded min.	0.34 mm ²
Conductor cross section stranded max.	1.5 mm ²
Conductor cross section AWG/kcmil min.	22
Conductor cross section AWG/kcmil max	16
External cable diameter	6 mm ... 8 mm
Status display	1 LED
Protective circuit/component	Varistor

Drawings

Dimensioned drawing

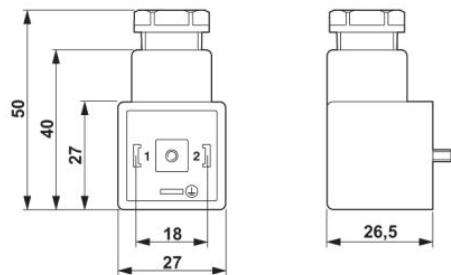

Circuit diagram

