

SACC-V-3CON-PG9/BI

Order No.: 1527993



Valve connector, 3-pos., type BI, unconnected, screw connection, cable screw connection Pg9

Commercial data

EAN	 4 017918 981013
Pack	1
Customs tariff	85369010
Catalog page information	Page 110 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
2006-01-25



Technical data

General data


Rated current at 40°C	10 A
Rated voltage	240 V
Number of positions	3
Volume resistance	$\leq 15 \text{ m}\Omega$
Insulation resistance	$\geq 100 \text{ M}\Omega$
Ambient temperature (operation)	-25 °C ... 120 °C (plug connectors)

General characteristics

Surge voltage category	II
Pollution degree	3
Degree of protection	IP65
Contact material	CuSn
Contact surface material	Ni
Valve plug contact insert material	PA6
Material, housing, valve plug	PA6
Sealing material	NBR
Type of connection	Screw connection
Conductor cross section stranded min.	0.34 mm ²
Conductor cross section stranded max.	1.5 mm ²
Conductor cross section AWG/kcmil min.	22
Conductor cross section AWG/kcmil max	16
External cable diameter	6 mm ... 8 mm
Status display	No

Drawings

Dimensioned drawing

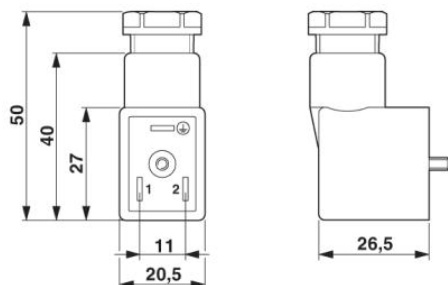

Circuit diagram

