


SACC-V-3CON-PG9/A-PFL 12/24

Order No.: 1533314

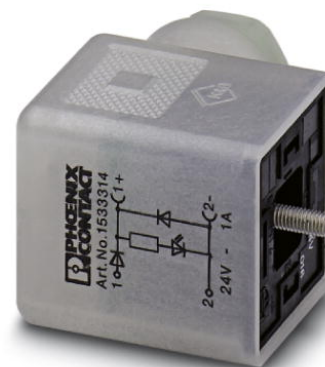

Valve connector, 3-pos., type A, 1 LED, with protective circuit, screw connection, cable screw connection Pg9

Commercial data

EAN	 4 046356 026000
Pack	1
Customs tariff	85369010
Catalog page information	Page 110 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
2006-03-23



Technical data

General data


Rated current at 40°C	2 A
Rated voltage	24 V
Number of positions	3
Volume resistance	$\leq 15 \text{ m}\Omega$
Insulation resistance	$> 100 \text{ M}\Omega$
Ambient temperature (operation)	-25 °C ... 85 °C (valve plug)

General characteristics

Surge voltage category	II
Pollution degree	3
Degree of protection	IP65
Contact material	CuSn
Contact surface material	Ni
Valve plug contact insert material	PA6
Material, housing, valve plug	PA6
Sealing material	NBR
Type of connection	Screw connection
Conductor cross section stranded min.	0.34 mm ²
Conductor cross section stranded max.	1.5 mm ²
Conductor cross section AWG/kcmil min.	22
Conductor cross section AWG/kcmil max	16
External cable diameter	6 mm ... 8 mm
Status display	1 LED
Protective circuit/component	Damping diode

Drawings

Dimensioned drawing

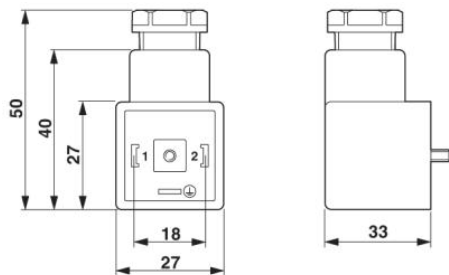

Circuit diagram

