

SAC-2P-M12MS ASI TR

Order No.: 1539570



Termination resistor ASi

Commercial data

EAN	 4 046356 081047
Pack	5
Customs tariff	85366990
Catalog page information	Page 19 (IF-2009)

Product notes

WEEE/RoHS-compliant since:
2005-09-01



Technical data

General data

Rated current at 40°C	4 A
Rated voltage	60 V
Number of positions	2
Ambient temperature (operation)	-25 °C ... 90 °C (connector)


General characteristics

Coding	A - standard
--------	--------------

Surge voltage category	II
Pollution degree	3
Degree of protection	IP65/IP67/IP69K
Insertion/withdrawal cycles	≥ 100
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material of grip body	TPU, hardly inflammable, self-extinguishing
Material, knurls	Zinc die-cast, (nickel-plated)
Status display	No

Drawings

Dimensioned drawing

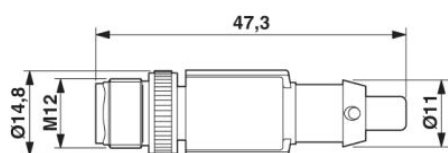

M12 x 1 male connector, straight