

SACC-M12MR-5SC SH DN

Order No.: 1549803



Bus system plug connector, male, angled, 5-pos., M12, shielded, A-coded, spring-cage connection, metal knurl, cable cross section max. 8 mm

CANopen

DeviceNet

Commercial data

EAN	 4 046356 149020
Note	Made-to-order
Pack	1
Customs tariff	85444290
Catalog page information	Page 283 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
2006-07-31



Technical data

General data

Rated current at 40°C	4 A
Rated voltage	60 V
Number of positions	5
Volume resistance	$\leq 8 \text{ m}\Omega$
Insulation resistance	$\geq 100 \text{ M}\Omega$
Ambient temperature (operation)	-40 °C ... 85 °C (Male connector / female connector)

General characteristics

Coding	A - standard
Surge voltage category	II
Pollution degree	3
Degree of protection	IP67
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	PA 66
Material of grip body	Zinc die-cast, nickel-plated
Material, knurls	Nickel-plated brass
Sealing material	NBR
Type of connection	Spring-cage conn.
Conductor cross section stranded min.	0.14 mm ²
Conductor cross section stranded max.	0.5 mm ²
Conductor cross section AWG/kcmil min.	26
Conductor cross section AWG/kcmil max	20
External cable diameter	4 mm ... 8 mm
Status display	No

Certificates




Certification

CUL, UL

Drawings

Dimensioned drawing

M12 x 1 female connector, angled, shielded

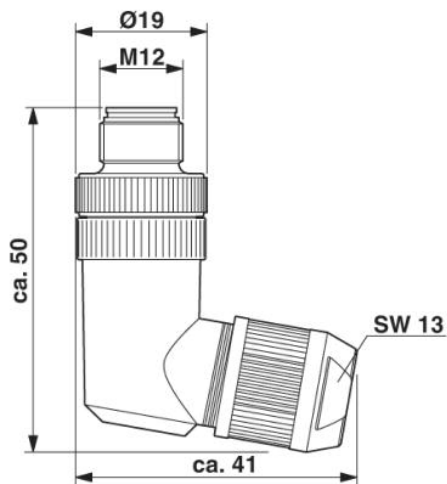

Schematic diagram

Pin assignment M12 male connector, 5-pos., A-coded, male side

