

SACC-M12MS-4QO-0,34-M

Order No.: 1641691



Sensor/actuator connector, male connector, straight, 4-pos., M12, A-encoded, QUICKON-ONE, high-grade steel knurl, maximum cable diameter of 6 mm

Commercial data

EAN	 4 017918 928926
Pack	1
Customs tariff	85366990
Catalog page information	Page 48 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
2005-12-01



Technical data

General data

Rated current at 40°C	4 A
Rated voltage	125 V
Number of positions	4
Volume resistance	$\leq 5 \text{ m}\Omega$
Insulation resistance	$\geq 100 \text{ M}\Omega$
Ambient temperature (operation)	-25 °C ... 80 °C (Male connector / female connector)

General characteristics

Standards/regulations	M12 connector IEC 61076-2-101
Coding	A - standard
Surge voltage category	II
Pollution degree	3
Degree of protection	IP65/67
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	PA 66
Material of grip body	PA 66
Material, knurls	Zinc die-cast, (nickel-plated)
Sealing material	NBR
Type of connection	QUICKON fast connection
Conductor cross section stranded min.	0.14 mm ²
Conductor cross section stranded max.	0.34 mm ²
Conductor cross section AWG/kcmil min.	26
Conductor cross section AWG/kcmil max	22
Wire diameter including insulation	0.7 mm ... 1.6 mm
Frequency of connections between conductors of the same cross section	10
External cable diameter	3.5 mm ... 6 mm
Wire insulation material	PVC / PE
Tightening torque, union nut	0.8 Nm
Wrench size, union nut	13 mm
Structure of individual litz in acc. with VDE 0295 / smallest wire diameter	Class 2-6
Status display	No

Certificates

Certification

CUL, GOST, UL

Accessories


Item	Designation	Description
------	-------------	-------------

Tools

1208432	SAC BIT M12-D15	Nut for assembling sensor/actuator cables with M12 connector and for M12 connectors with QUICKON fast connection technology, for 4 mm hexagonal drive
1212033	SAC BIT QUICKON-W13	Nut for assembling QUICKON pressure nuts with 13 mm wrench size, for 4 mm hexagonal drive
1208429	TSD 04 SAC	Torque screwdriver, with preset torque of 0.4 Nm and 4 mm hexagonal drive for M12 connectors
1212224	TSD-M 1,2NM	Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 0.3 - 1.2 Nm


Drawings

Dimensioned drawing

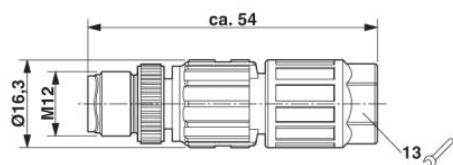

M12 x 1 male connector, straight

Schematic diagram

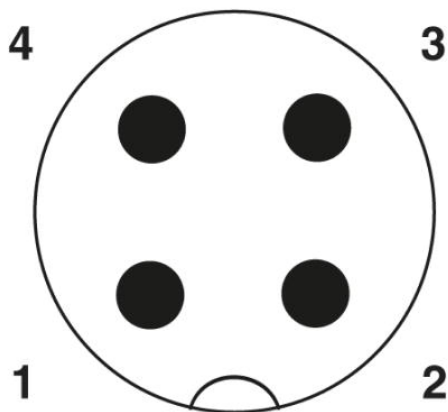

Pin assignment M12 plug, 4-pos., A-coded, view plug side