

SACC-M12MS-5CON-PG11-DUO-M

Order No.: 1662748



<http://eshop.phoenixcontact.se/phoenix/treeViewClick.do?UID=1662748>

Sensor/actuator connector, male, straight, 5-pos., M12, A-coded, screw connection, metal knurl, cable screw connection Pg11-DUO

Commercial data

EAN	 4 017918 137519
Pack	1
Customs tariff	85366990
Catalog page information	Page 46 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
2006-03-23



Technical data

General data

Rated current at 40°C	4 A
Rated voltage	60 V
Number of positions	5
Volume resistance	$\leq 8 \text{ m}\Omega$
Insulation resistance	$\geq 100 \text{ M}\Omega$
Ambient temperature (operation)	-40 °C ... 85 °C

General characteristics

Standards/regulations	M12 connector IEC 61076-2-101
Coding	A - standard
Surge voltage category	II
Pollution degree	3
Degree of protection	IP67
Contact material	CuZn
Contact surface material	CuSnZn
Contact carrier material	PA 66
Material of grip body	PBT
Material, knurls	Zinc die-cast, (nickel-plated)
Sealing material	NBR
Type of connection	Screw connection
Conductor cross section stranded min.	0.25 mm ²
Conductor cross section stranded max.	0.75 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	18
External cable diameter	3 mm ... 5.2 mm (2x)
Status display	No


Certificates

Certification

GOST



Drawings

Dimensioned drawing

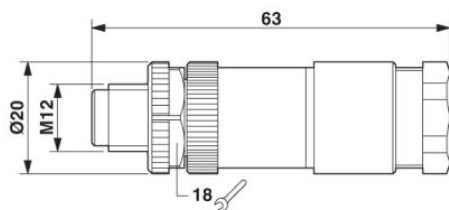

M12 x 1 male connector, straight

Schematic diagram

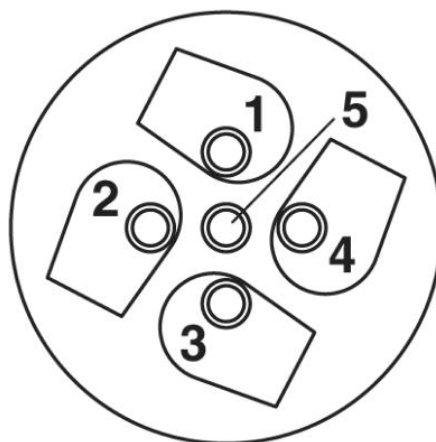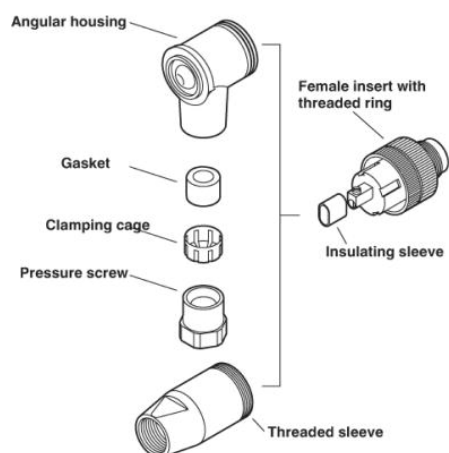

Male/Female M12

Cable connection side M12 (screw connection)

Pin assignment M12 male connector, 5-pos., A-coded, male side

