

SAC-3P-M 8Y/2XM 8FS VP

Order No.: 1696222



Y-distributor M8, with female connector M8, 3-pos. connector (parallel)

Commercial data

EAN	 4 017918 182403
Pack	5
Customs tariff	85366990
Catalog page information	Page 104 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
2006-11-29



Technical data

General data

Rated current at 40°C	4 A
Rated voltage	60 V
Number of positions	3
Volume resistance	$\leq 5 \text{ m}\Omega$
Insulation resistance	$\geq 10 \text{ G}\Omega$
Ambient temperature (operation)	-25 °C ... 90 °C (Male connector / female connector)

General characteristics

Standards/regulations	M8 connector IEC 61076-2-104
Coding	A - standard
Surge voltage category	II
Pollution degree	3
Degree of protection	IP65/IP67
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material of grip body	TPU, hardly inflammable, self-extinguishing
Material, knurls	Zinc die-cast, (nickel-plated)
Sealing material	NBR
Status display	No

Certificates

Certification

CUL Listed, UL Listed

Accessories

Item	Designation	Description
------	-------------	-------------

Protection and sealing elements


1682540	PROT-M8	An M8 screw plug for the unoccupied M8 sockets of the sensor/ actuator cable, boxes and flush-type connectors
---------	---------	---

Tools


1208461	SAC BIT M8-D10	Nut for assembling sensor/actuator cables with M8 connector and for M8 connectors with QUICKON fast connection technology, for 4 mm hexagonal drive
1208487	TSD 02 SAC	Torque screwdriver, with preset torque of 0.2 Nm and 4 mm hexagonal drive for M8 connectors

Drawings

Dimensioned drawing

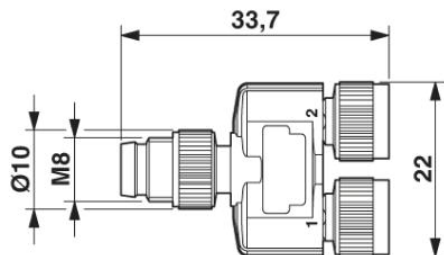


Circuit diagram

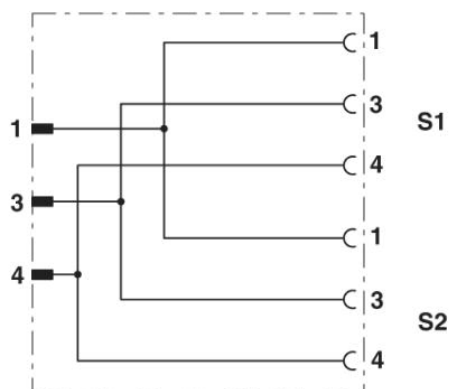


Contact assignment of the M8 Y distributor

Schematic diagram

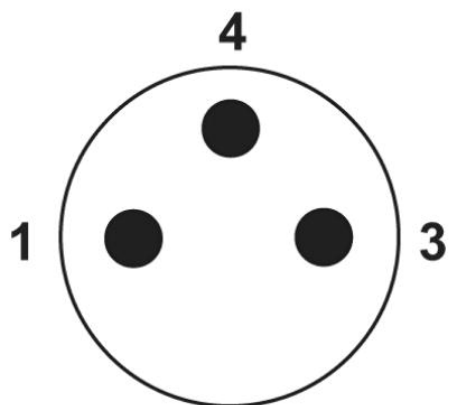

Pin assignment M8 plug, 3-pos., view male side

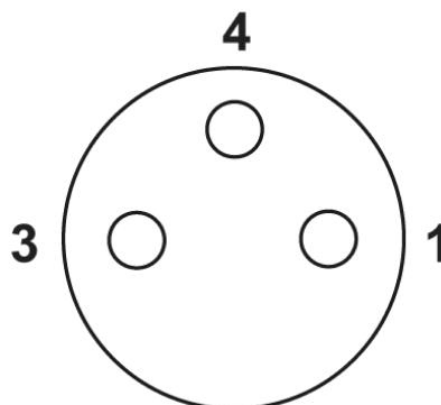

Pin assignment M8 socket, 3-pos., view female side