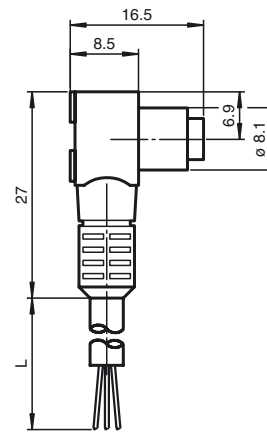


**Model number****V3-WR-E2-5M-PUR**

M8 cable socket.

Features

- Snap locking
- Built-in LED, as operating and function indicator

Dimensions**Technical data****General specifications**

Number of poles	3
Construction type	Socket, angled, with 2 LEDs

Indicators/operating means

LED green	Operating display
LED yellow	Functional display NO

Electrical specifications

Operating voltage	10 ... 30 V DC
Operating current	max. 4 A
Volume resistance	< 5 mΩ

Ambient conditions

Ambient temperature	-25 ... 90 °C (248 ... 363 K)
Degree of soiling	3

Mechanical specifications

Contact elements	spring-loaded contact socket
pin diameter	1 mm
Protection degree	IP67
Material	
Contacts	CuSn
Contact surface	Au
Handle	PUR, transparent
Cable	PUR
Core isolation	PVC
Cable	highly flexible
Sheath diameter	Ø4.6 mm
Colour	black
Cores	3 x 0.25 mm ²
Length	L 5 m
Flammability	
Contact material	94V-2
Housing	94V-2
Wire	flame resistant according to VDE 0472 part 804

Electrical connection