




Dimensions

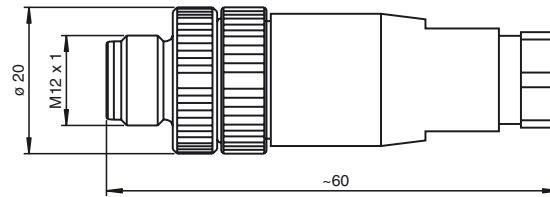

Model Number

V15S-G-PG9

Cable connector, M12, 5-pin, ready for assembly

Features

- Gold plated contacts

Technical data

General specifications

Number of pins	5
Connection 1	Connector, male
Construction type 1	straight
Threading 1	M12

Electrical specifications

Operating voltage	U_B	max. 60 V AC/DC
Operating current		max. 4 A
Volume resistance		< 3 m Ω

Ambient conditions

Ambient temperature	-25 ... 85 °C (248 ... 358 K)
Pollution Degree	3

Mechanical specifications

Protection degree	IP67
Connection	1 x M12 jack, angled Screw terminals for max. 0.75 mm ² PG9 screwed connection

Material

Contacts	CuZn
Contact surface	Au
Handle	PA
Slotted nut	CuZn, nickel-plated
Cable	
Sheath diameter	6 ... 8 mm

Electrical connection

