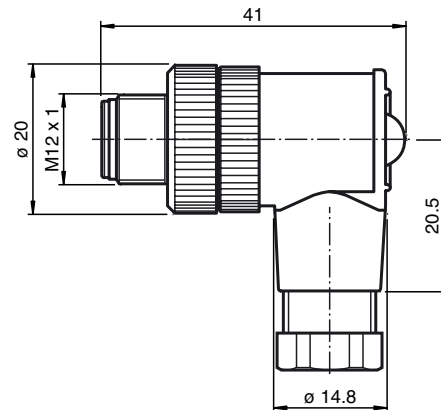


**Model Number****V1S-W**

Non pre-wired cable connector

Features

- Gold plated contacts

Dimensions**Technical data****General specifications**

Number of poles	4
Construction type	Connector, angled

Electrical specifications

Operating voltage	U_B	max. 250 V
Operating current		max. 4 A

Ambient conditions

Ambient temperature	-40 ... 85 °C (233 ... 358 K)
---------------------	-------------------------------

Mechanical specifications

Protection degree	IP67
Connection	1 x M12 connector, angled Screw terminals for max. 0.75 mm ² PG7 screwed connection

Material

Contacts	CuZn
Contact surface	Au
Handle	PBT
Slotted nut	CuZn, nickel-plated

Cable

Sheath diameter	4 ... 6 mm
-----------------	------------

Electrical connection