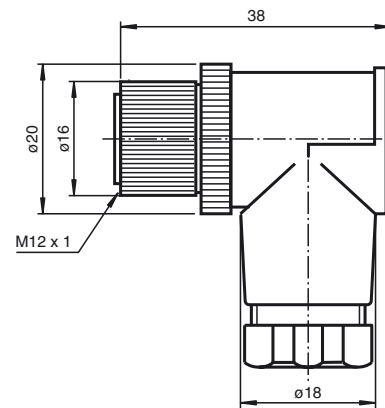


**Model number****V15-WV2A-PG9-Y117132**

Non pre-wired cable socket

Features

- Slotted V2A nut
- Gold plated contacts

Dimensions**Technical data****General specifications**

Number of poles	5
Construction type	Socket, angled

Electrical specifications

Operating voltage	max. 30 V DC
Operating current	max. 4 A
Volume resistance	< 3 mΩ

Ambient conditions

Ambient temperature	-40 ... 85 °C (233 ... 358 K)
Degree of soiling	3

Mechanical specifications

Protection degree	IP67
Connection	1 x M12 connector, angled Screw terminals for max. 0.75 mm ² PG9 screwed connection

Material

Contacts	CuSn
Contact surface	Au
Handle	PA 66
Slotted nut	V2A
Cable	
Sheath diameter	6 ... 8 mm

Electrical connection