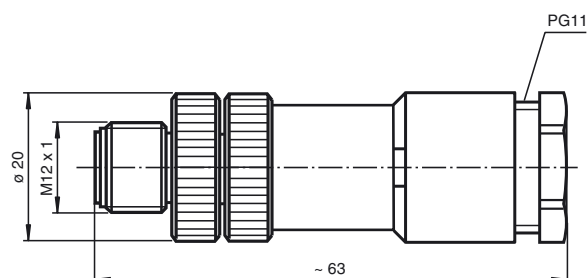


**Model number****V1S-G-DUO-PG11**Non pre-wired cable connector,
Duo version**Features**

- Simple assembling of 2 signals to one M12 plug-in station
- Two double cable seals included in the delivery package
- Suitable for cable diameters 2 ... 3 mm und 4 ... 5 mm

Dimensions**Technical data****General specifications**

Number of poles	4
Construction type	Connector, straight

Electrical specifications

Operating voltage	max. 250 V
-------------------	------------

Ambient conditions

Ambient temperature	-40 ... 85 °C (233 ... 358 K)
---------------------	-------------------------------

Mechanical specifications

Protection degree	IP67
Connection	1 x M12 connector, straight Screw terminals for max. 0.75 mm ²

Material

Contacts	CuZn
Contact surface	Au
Handle	PA 66

Cable

Sheath diameter	2 ... 3 mm or 4 ... 5 mm
-----------------	--------------------------