



### Model Number


**V95-W-2M-PVC**

Cable socket, 7/8", 5-pin, PVC cable

### Features

- Immunity to vibration due to the O-ring which is integrated in the slotted nut
- Suitable for 2-, 3- and 4-wire technology

### Dimensions

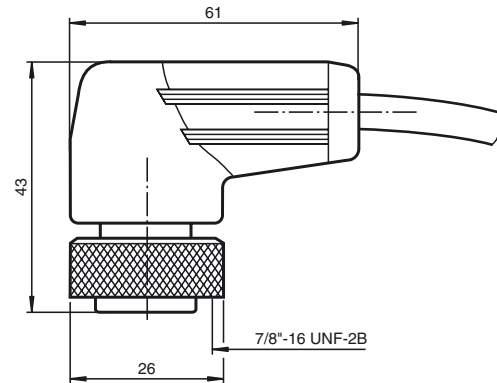

### Technical data

#### General specifications

Number of poles	5
Connection 1	Connector, female
Construction type 1	angled
Threading 1	7/8"
Connection 2	free cable end

#### Electrical specifications

Operating voltage	max. 600 V
Operating current	max. 8 A

#### Ambient conditions

Ambient temperature	-40 ... 90 °C (233 ... 363 K)
---------------------	-------------------------------

#### Mechanical specifications

Protection degree	IP68/NEMA 6P only in complete screwed state
Connection	1 x connector 7/8"-16 UN, angled Cable: flexible lead

#### Material

Contacts	CuZn, nickel-plated
Contact surface	Au
Handle	PUR, yellow
Cable	PVC
Slotted nut	Alu, black coated
Core isolation	PVC
Cable	16 AWG - UL STOW, copper lead
Colour	yellow
Cores	5 x 1.5 mm <sup>2</sup> (16 AWG)
Length	L 2 m

### Electrical connection

