


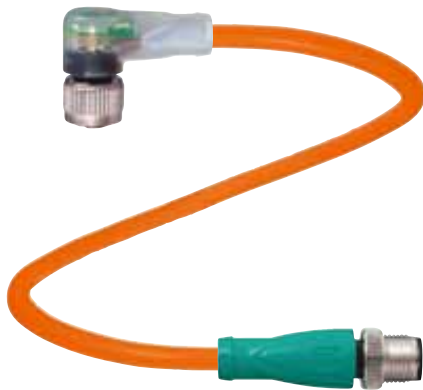

Model number


V1-W-A2-1,5M-PUR H/S-V1-G

Connecting cable, M12 with LED, 4-pin,
PUR cable crosslinked by irradiation

Features

- Built-in LED, as operating and function indicator
- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching
- Gold plated contacts
- Protection degree IP67 / IP68 / IP69K
- Flexible sheathing
- Halogen-free
- Suitable for 3- and 4-wire technology

Dimensions

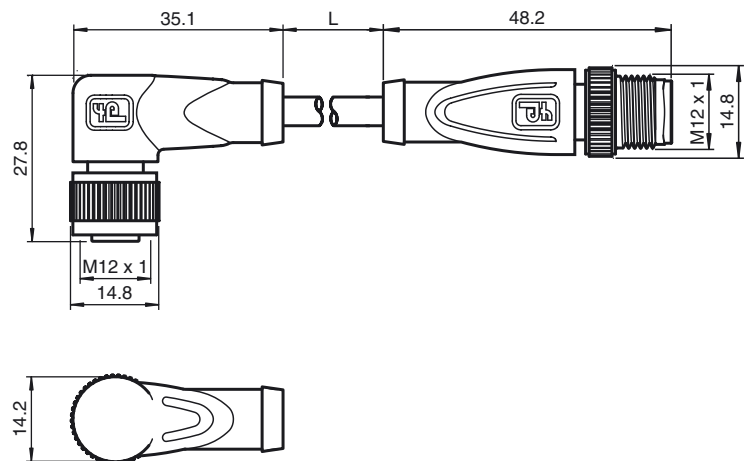

Technical data

General specifications

Number of poles	4
Connection 1	Connector, female
Construction type 1	angled
Threading 1	M12
Connection 2	Connector, male
Construction type 2	straight
Threading 2	M12

Indicators/operating means

LED green	Operating display
LED yellow	Functional display NO

Electrical specifications

Operating voltage	max. 24 V DC $\pm$ 15%
Test voltage	> 1500 V _{eff} AC
Operating current	max. 4 A
Volume resistance	< 5 m Ω



Ambient conditions

Ambient temperature	-20 ... 105 °C (253 ... 378 K) active -50 ... 105 °C (223 ... 378 K) static
Degree of soiling	3


Mechanical specifications

Contact elements	spring-loaded contact socket
pin diameter	1 mm
Protection degree	IP67 / IP68 / IP69K
Material	
Contacts	CuSn / Au
Contact surface	Au
Handle	TPU, transparent/green
Cable	PUR
Slotted nut	diecast zinc
(Cap??-translator) connector	diecast zinc
Core isolation	TPE
Cable	fine-strand, flexible
Covering (Sheathing)	irradiated
Sheath diameter	Ø4.8 mm
Bend radius	> 40 mm
Colour	orange
Cores	4 x 0.34 mm ²
Conductor construction	19 x 0.15 mm Ø
Length	L 1.5 m
Flammability	
Contact material	94V-2

Electrical connection 1



Electrical connection 2



Housing	94V-2
---------	-------