



Model Number


VMC-2+PE/LED/Z2-0,6M-PVC-V1-W

Valve connector shape C on M12 circular connector with LED display

Features

- Valve connector according DIN 43650
- Built-in LED, as operating and function indicator

Dimensions

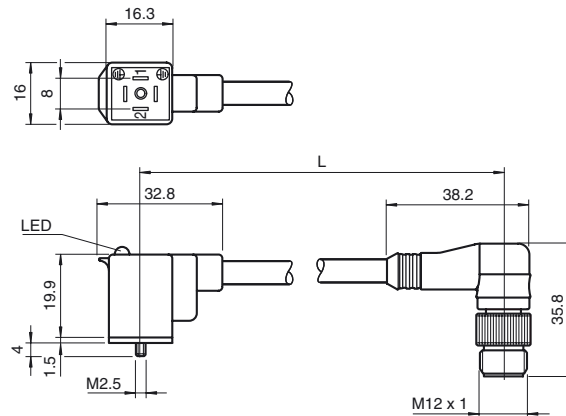

Technical data

General specifications

Number of poles	2 + PE
Connection 1	Valve connector DIN
Construction type 1	angled
Connection 2	Connector, male
Construction type 2	angled
Threading 2	M12

Indicators/operating means

LED green	Operating display
-----------	-------------------

Electrical specifications

Operating voltage	U_B	24 V AC/DC
Operating current		max. 10 A

Ambient conditions

Ambient temperature	-5 ... 70 °C (268 ... 343 K)
---------------------	------------------------------

Mechanical specifications

Protection degree	IP65
Material	
Contacts	brass, silver-plated
Handle	PP
Cable	PVC
Core isolation	PVC
Cable	
Sheath diameter	5.5 mm
Colour	black
Cores	3 x 0.5 mm ²
Conductor construction	28 x 0.15 mm Ø
Length	L 0.6 m

Electrical connection

