



Model Number


V1-W-E2-0,3M-PUR H/S-T-V1-G

Y connecting cable, M12 to 2xM12 with LED, 3-pin, irradiated PUR cable

Features

- Built-in LED, as operating and function indicator
- Simple assembling of 2 signals to one M12 plug-in station
- Immunity to vibration
- Flexible sheathing
- Halogen-free

Dimensions

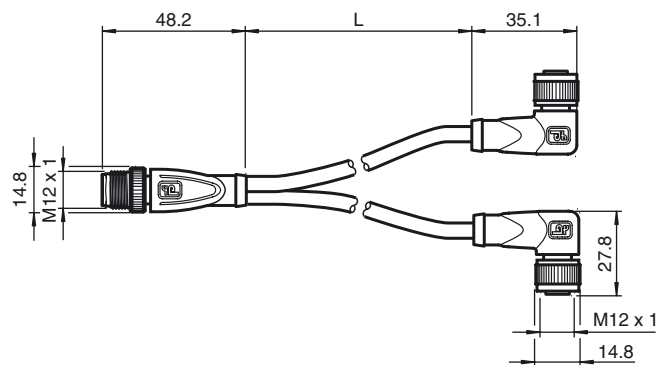

Technical data

General specifications

Number of pins	3
Construction type	right-angled jacks straight connectors

Indicators/operating means

LED green	Operating display
LED yellow	Functional display NO

Electrical specifications

Operating voltage	U_B	max. 24 V DC $\pm$ 15%
Operating current		max. 4 A
Volume resistance		< 5 m Ω

Ambient conditions

Ambient temperature	-5 ... 80 °C (23 ... 176 °F) active -25 ... 80 °C (-13 ... 176 °F) static
Pollution Degree	3

Mechanical specifications

Protection degree	IP65 / IP68 / IP69K
Connection	1 x M12 connector, straight 2 x M12 right-angled sockets

Material

Contacts	CuSn
Contact surface	Ni/Au
Connector	TPU
Body	TPU, transparent/green
Cable	PUR, irradiated
Slotted nut	Zinc die-casting, nickel-plated
Sleeve connector	Zinc die-casting, nickel-plated
Core insulation	TPE

Cable

Color	orange
Cores	3 x 0.34 mm ²
Length	L