



Model Number


V3-GM-0,3M-PUR-T-V1-G

Y connecting cable, M12 to 2 x M8, 3-pin, PUR cable

Features

- Simple assembling of 2 signals to one M12 plug-in station
- Immunity to vibration
- Halogen-free

Dimensions

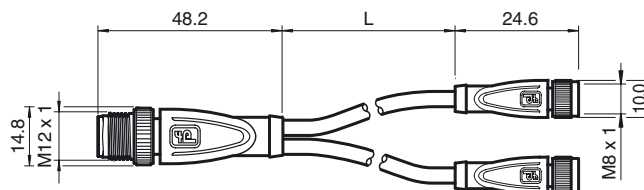

Technical data

General specifications

Number of poles	3
Construction type	Jacks, straight connectors, straight

Electrical specifications

Operating voltage	U_B	max. 60 V DC
Operating current		max. 4 A
Volume resistance		< 5 m Ω

Ambient conditions

Ambient temperature	-5 ... 80 °C (268 ... 353 K) active -25 ... 80 °C (248 ... 353 K) static
Degree of soiling	3

Mechanical specifications

Protection degree	IP65 / IP68 / IP69K
Connection	1 x M12 connector, straight 2 x M8 socket, straight

Material

Contacts	CuSn
Contact surface	Ni/Au
Connector	TPU
Handle	TPU, black
Cable	PUR
Slotted nut	Zinc die-casting, nickel-plated
Sleeve connector	Zinc die-casting, nickel-plated

Cable

Sheath diameter	$\varnothing$ 4.4 mm
Colour	dark grey (RAL 7021)
Cores	3 x 0.25 mm ²
Length	L 0.3 m

Electrical connection

