



Model Number


V3-GM-E2-BK5M-PUR-U

Cable socket, M8, LED, 3-pin, PUR cable

Features

- Built-in LED, as operating and functional indicator
- Raw cable with cURus approval
- Appropriate for conveyor chains
- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching
- Gold plated contacts
- Halogen-free
- Suitable for 2- and 3-wire technology

Dimensions

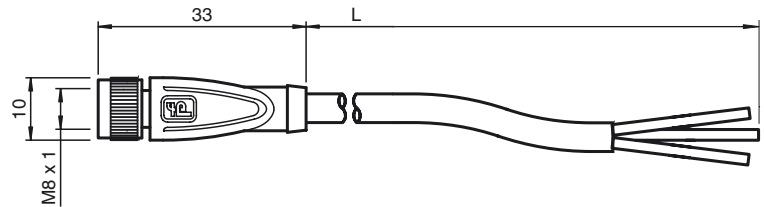

Technical data

General specifications

Number of poles	3
Connection 1	Connector, female
Construction type 1	straight
Threading 1	M8
Connection 2	free cable end

Indicators/operating means

LED green	Operating display
LED yellow	Functional display NO

Electrical specifications

Operating voltage	U_B	max. 24 V DC \pm 15%
Test voltage		> 1500 V _{eff} AC
Operating current		max. 3 A
Volume resistance		< 5 m Ω

Ambient conditions

Ambient temperature	-25 ... 100 °C (248 ... 373 K) for temperatures over 80 °C (353 K) reduced elongation at tear
Pollution Degree	3

Mechanical specifications

Contact elements	spring-loaded contact socket
pin diameter	1 mm
Protection degree	IP67
Material	
Contacts	CuSn / Au
Contact surface	Au
Handle	TPU, transparent
Cable	PUR
Slotted nut	diecast zinc
Core isolation	PP
Cable	extra-fine wire, flexible
Sheath diameter	\varnothing 4.3 mm
Bend radius	> 10 x cable diameter, appropriate for conveyor chains
Colour	black
Cores	4 x 0.34 mm ²
Conductor construction	42 x 0.1 mm \varnothing
Length	L
Flammability	
Contact material	94 V-2
Housing	94 V-2

Approvals and certificates

UL approval	cURus AWM 20549 AWM I/II A/B 80°C 300V FT2 (cable)
-------------	--

Electrical connection 1



Electrical connection 2

