



Model Number


V125-W-YE2M-PVC

Connecting cable, 1/2" - 20 UNF, 5-pin, PVC cable

Features

- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching
- Gold-plated and machined contacts
- Protection degree IP68/IP69K
- Suitable for 2-, 3- and 4-wire technology

Dimensions

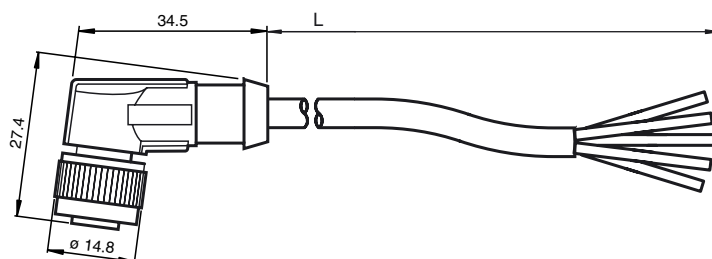

Technical data

General specifications

Number of pins	5
Connection 1	female connector
Construction type 1	right angle
Threading 1	1/2"
Connection 2	cable end

Electrical specifications

Operating voltage	U_B	max. 125 V DC
Test voltage		> 1500 V _{eff} AC
Operating current		max. 4 A
Volume resistance		< 5 mΩ

Ambient conditions

Ambient temperature	-25 ... 105 °C (-13 ... 221 °F)
Pollution Degree	3


Mechanical specifications

Mechanical specifications		
Pin diameter	1 mm	
Protection degree	IP68 / IP69K	
Connection	1/2" UNF socket, angled	
Material		
Contacts	CuSn / Au	
Contact surface	Ni/Au	
Body	TPU , yellow	
Cable	PVC	
Slotted nut	brass, nickel-plated	
Core insulation	PVC	
Cable	fine-strand, flexible	
Sheath diameter	Ø 5.9 mm	
Bending radius	10 x cable Diameter:	
Color	yellow	
Cores	5 x 0.34 mm ²	
Length	L	2 m
Flammability		
Contact material	94 V-2	
Housing	94 V-2	
Wire	VW-1 flame rating from UL	

Approvals and certificates

UL approval	cULus Listed, General Purpose
-------------	-------------------------------

Electrical connection



1	RD/WH
2	RD
3	GN
4	RD/YE
5	RD/BK