



Model Number


V93-W-YE2M-STOOW

Female connector, 7/8" - 16 UNF, 3-pin,
PVC cable

Features

- Thread 7/8"

Dimensions

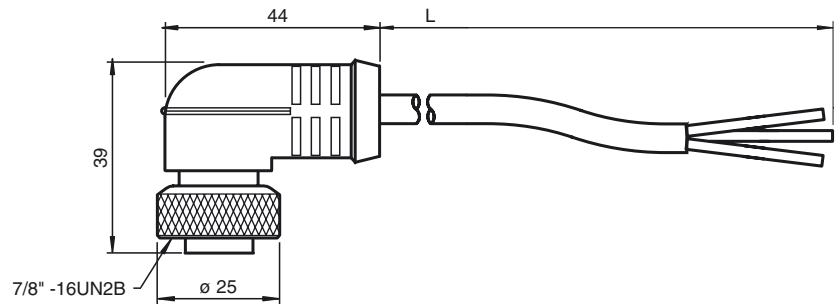

Technical data

General specifications

Number of pins	3
Connection 1	female connector
Construction type 1	right angle
Threading 1	7/8"
Connection 2	cable end

Electrical specifications

Operating voltage	U_B	max. 600 V
Test voltage		1500 V
Operating current		13 A
Volume resistance		< 5 m Ω


Ambient conditions

Ambient temperature	-30 ... 105 °C (-22 ... 221 °F)
---------------------	---------------------------------

Mechanical specifications

Protection degree	IP67
Material	
Contacts	gold plated copper alloy
Cable	PVC
Slotted nut	anodized aluminium
Core insulation	PVC
Cable	fine-strand, flexible
Sheath diameter	Ø 9.9 mm
Bending radius	10 x cable diameter
Color	yellow
Cores	3 x 1.5 mm ² (16 AWG)
Length	L
Note	STOOW UL Standard

Electrical connection



1	GN/YE
2	BK
3	WH