



Givarkabel med

- pnp till npn-inverterare
- impulsförlängare



Connecting Cables with

- pnp/npn converter or
- pulse stretching

M8 (TK...)




M12 (VK...)

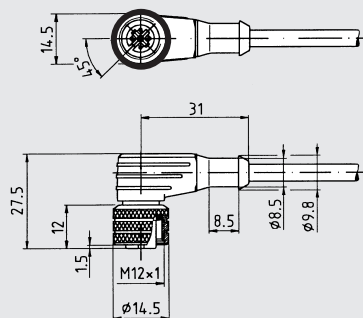

mm

Anslutningschema 3-tråd, pnp Connection diagram 3 conductors, pnp



Teknisk Data för +20 °C, 24 V DC / Technical data at +20 °C, 24 V DC				
Arbetsspänning		Service voltage		10 ... 35 V DC
Max belastning		Maximum rating		200 mA
Intern förbrukning		Internal power consumption		< 8 mA
Spänningsfall		Voltage drop		< 2 V
Responstid		Response time		0,1 ms
Arbetstemperatur		Ambient temperature		-10 ... +60 °C
Isolering		Insulation voltage endurance		500 V
Skyddsklass		Protection class		IP 67
Kapslingsmaterial		Housing material		VA
Kabeltyp/ Cable type	M8	3 x 0,25 mm²	PU-Überzug med PVC-Mantel /	
	M12	3 x 0,34 mm²	PU coating on PVC jacket	
Impulsförlängare / Pulse stretching				
Anslutning/	Kabellängd /	Impulslängd	Typ /	Best.Nr /
Connector	Cable length	Pulse duration	Type designation	Art.No
M8, pnp	5 m	20 ms	TKHM-W-5/T 20	8205-003
M8, pnp	5 m	150 ms	TKHM-W-5/T 150	8205-004
M12, pnp	5 m	20 ms	VKHM-W-5/T 20	8205-001
M12, pnp	5 m	150 ms	VKHM-W-5/T 150	8205-002
pnp/npn-inverterare / pnp/npn converter				
M8	5 m	–	TKHM-W-5/U	8203-002
M12	5 m	–	VKHM-W-5/U/LP	8203-001