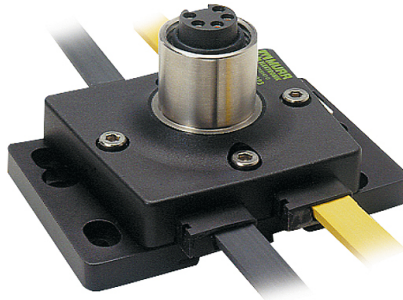


MASI67 installation technology "Converter 2x profile cable to 7/8" female"

MASI67 converter
2 x profile cable to 7/8" (female)

Image

Vicarious picture

Approvals**Technical Data**

Operating voltage	max. 36 V DC
Total current	max. 8 A
Isolation voltage	AS-Interface/Power: 200 V

Contact layout

Contact 1	AS-Interface + (brown)
Contact 2	AS-Interface - (blue)
Contact 3	n.c.
Contact 4	+24 V (brown)
Contact 5	0 V (blue)

General data

Protection	IP67
Mounting method	DIN-rail mountable (EN 60715) or screw fixing
Temperature range	-20...+60 °C (storage temperature -40...+80 °C)

Commercial data

Net weight	1109
Weight unit	gram
Basic unit	pc.
Customs tariff number	85369010
Unit (piece)	1
Limited value	1


Comments

For connection cables please see chapter "Field passive"

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 04/13

Contact layout

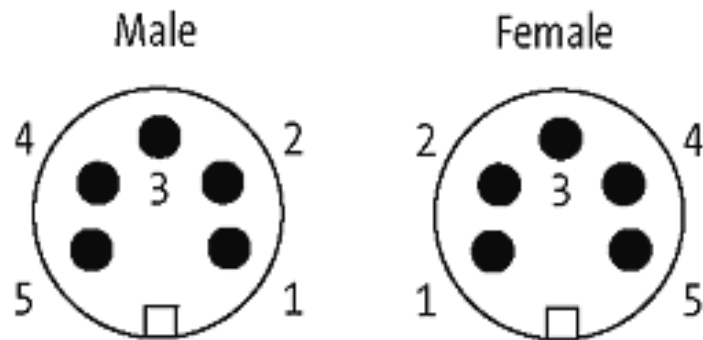

Dimension drawing

