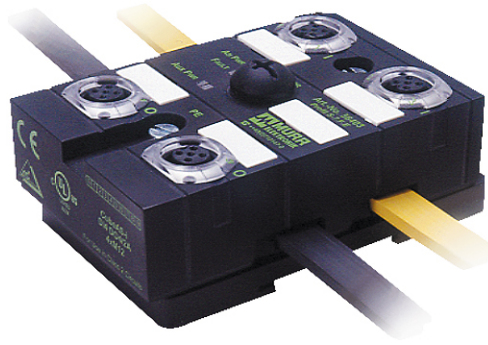


MASI67 I/O Modul 4 digital inputs, 4 digital outputs

Digital inputs and outputs

DI4 - 0.2 A DO4 - 2 A (4×M12)

Double assignment of M12 females, PIN 2 + 4

Image

Vicarious picture

Approvals**Technical Data**

Bus voltage (AS-Interface)	26.5...31.6 V DC
Total current	max. 250 mA
Addressing	via built-in address port or master
Address range	1...31
Profile (IO/ID/ID2 code)	S-7.F.E
Double assignment of M12 female	yes
Input	
Sensor supply US	max. 200 mA from AS-Interface (short-circuit and overload protected)
Type	for 3-wire sensors or mechanical switches, p-switching (EN 61131-2)
Output	
Actuator supply UA	24 V DC external (18...30.2 V DC) EN 61131-2
Switching current per output	max. 2 A (short-circuit and overload protected)
Total current	max. 8 A

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 04/13

Diagnostic

Communication status via LED

Diagnostic via LED per module

Monitoring - no voltage yes

General data

Protection IP67

Temperature range -20...+60 °C (storage temperature -20...+70 °C)

Mounting method DIN-rail mountable (EN 60715) or screw fixing

Connection AS-Interface profile cable (black)

Commercial data

Net weight 242

Weight unit gram

Basic unit pc.

Customs tariff number 85176200

Unit (piece) 1

Limited value 1

Comments

For connection cables please see chapter "Field passive"

All housings are fully potted

Dimension drawing

