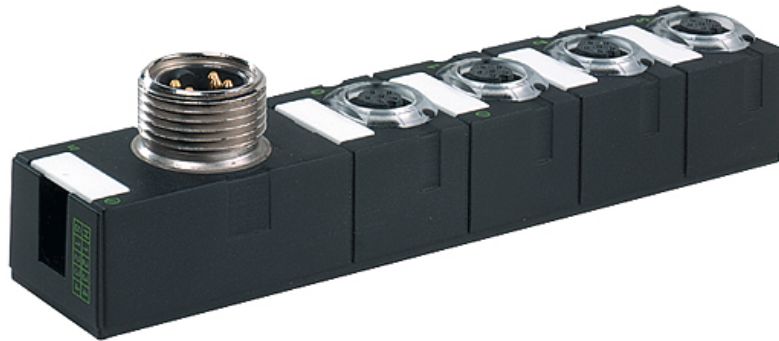


Power distributor Cube 67 "Cube67 PD 7/8""

Power distributor 4xM12
System accessories

Image

- IP67 protection

Vicarious picture

Approvals**Voltage inputs**

Input voltage	24 V DC (18...30.2 V DC) EN 61131-2
Connection	7/8" male, 5-polig
Load	max. 9 A

Supply voltage

Operating voltage	24 V DC (18...30.2 V DC) EN 61131-2
-------------------	-------------------------------------

Voltage output

Connection	M12 female, 6-pole
Load	max. 4 A

Diagnostic

Monitoring - no voltage	yes
Short circuit and overload	yes

General data

Protection	IP67
Temperature range	0...+55 °C (storage temperature -20...+75 °C)
Mounting method	2-hole screw mounting

Commercial data

Net weight	150
Weight unit	gram
Basic unit	pc.
Customs tariff number	85176200
Unit (piece)	1
Limited value	1

Comments

Housing fully potted.
For connection cables please see chapter "Field passive"

Dimension drawing

